

## Linear X-Ray Photodiode Detector Array with Signal Amplification


# XB8801R Series

An X-Scan Imaging XB8801R linear detector array is constructed of CMOS silicon photodiode array detector chips mounted on a single printed-circuit board. The imaging circuit of each detector chip consists of a contiguous linear array of photodiodes, a timing generator, digital scanning shift register, an array of charge integrating amplifiers, sample-and-hold circuits, and signal amplification chain. Each detector array generates an End-Of-Scan (EOS) pulse that can be used to initiate the scanning of the next detector array. Thus, a longer, continuous detector array can be formed from a daisy chain of smaller detector arrays.

For x-ray scanning applications, a scintillator material tailored to the user's application is attached to the surface of the detector array to convert x-ray photons into visible light for detection by the photodiode array. The XB8801R photodiode array is uniquely designed and processed to reduce radiation damage from the x-ray flux. The signal processing circuits are positioned 2 mm away from the photodiode array. These circuits are shielded from direct x-ray radiation using an external heavy-metal shield. The precision alignment of the metal shield with respect to the signal processing circuits is performed at the factory using a special molded housing and chip-on-board (COB) technology.

### Key Features

- Large element pitch with two selectable resolution modes: 0.1 mm and 0.2 mm
- Different array lengths available:
  - 2.0 inches (512 pixels at 0.1 mm, 256 pixels at 0.2 mm)
  - 4.0 inches (1024 pixels at 0.1 mm, 512 pixels at 0.2 mm)
- 5-V power supply operation
- Simultaneous integration by using an array of charge integrating amplifiers
- Sequential readout with a digital scanning shift register
- Integrated CDS circuits allow low noise and wide dynamic range up to > 4000
- User-specified scintillator material GOS:Tb, CsI:Tl etc.
- Extended radiation hardness lifetimes

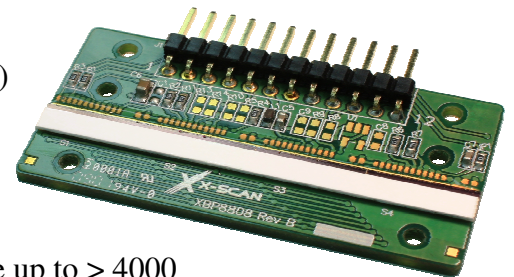

### Applications

- Linear x-ray imaging for industrial and food inspection
- Linear x-ray imaging for homeland security and contraband screening

# Photodiode Detector with Signal Amplification XB8801R Series

## ■ Mechanical specifications

Parameter	Symbol <sup>i</sup>	XB8801R-2.0 <sup>ii</sup> (low resolution 0.2-mm mode) <sup>iii</sup>	XB8801R-2.0 (high resolution 0.1-mm mode) <sup>iv</sup>	XB8801R-4.0 (low resolution 0.2-mm mode)	XB8801R-4.0 (high resolution 0.1-mm mode)	Unit
Element pitch	P	0.2	0.1	0.2	0.1	mm
Element diffusion width	W	0.170	0.085	0.170	0.085	mm
Element height	H	0.300	0.150	0.300	0.150	mm
Number of elements	–	256	512	512	1024	–
Active area length	–	51.2	51.2	102.4	102.4	mm


<sup>i</sup> Refer to enlarged view of active area figure.

<sup>ii</sup> 2-inch and 4-inch long detector are specified here. Other lengths (at multiples of 0.5 inches) are available upon special request.

<sup>iii</sup> When RS (pin 12) is tied to GND, the detector operates in the low 0.2-mm resolution mode. There are 256 pixels in a 2-inch detector (XB8801R-2.0) in 0.2-mm mode. There are 512 pixels in a 4-inch detector (XB8801R-4.0) in 0.2-mm mode.

<sup>iv</sup> When RS (pin 12) is tied to VDD, the detector operates in the high 0.1-mm resolution mode. There are 512 pixels in a 2-inch detector (XB8801R-2.0) in 0.1-mm mode. There are 1024 pixels in a 4-inch detector (XB8801R-4.0) in 0.1-mm mode.

## ■ Enlarged view of active area

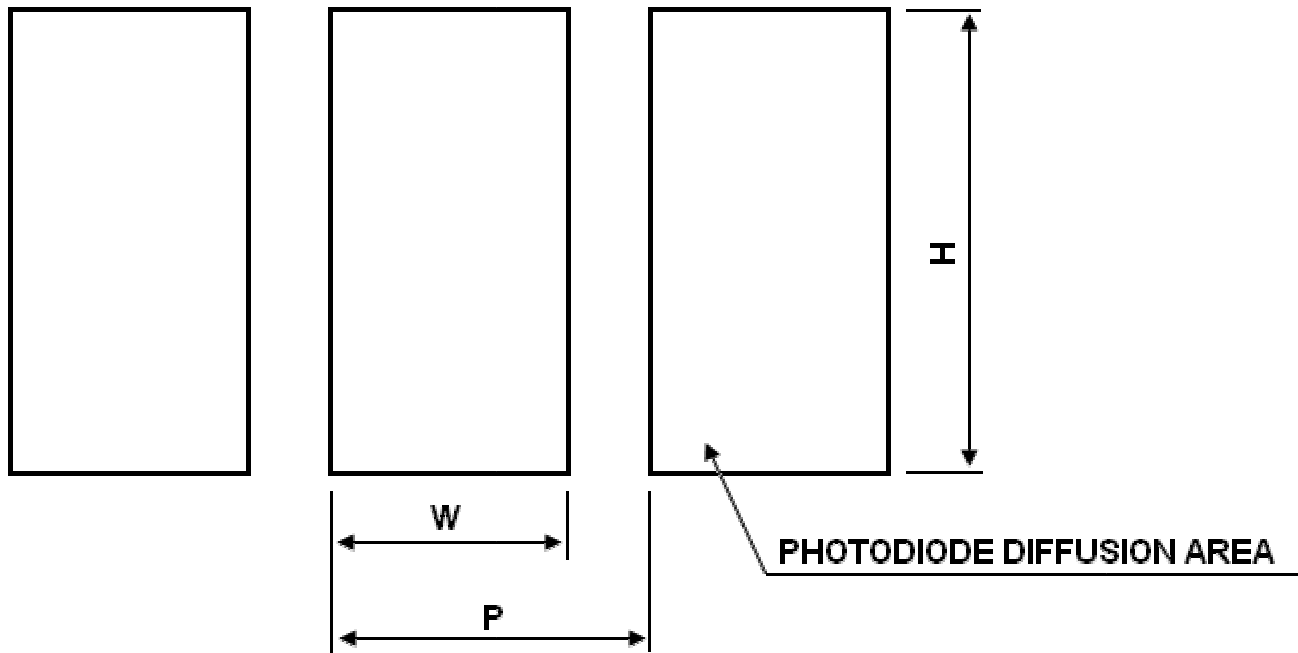

## ■ Absolute maximum ratings



*Electronic device sensitive to electrostatic discharge and x-ray radiation.* Although this device features ESD protection circuitry, permanent damage ranging from subtle performance degradation to complete device failure may occur on devices subjected to high-energy electrostatic discharges. Furthermore, although this device features radiation shielding for protection against anticipated x-ray radiation, permanent damage ranging from subtle performance degradation to complete device failure may occur on devices subjected to unanticipated x-ray radiation (e.g. off-axis or extremely high energy radiation). Therefore, proper precautions against ESD and x-ray radiation must be taken during handling and storage of this device.

Parameter	Symbol	Min	Max	Unit
Supply voltage	VDD	-0.3	+6	V
Reference voltage	VREF	-0.3	VDD + 0.3	V
Digital input voltages		-0.3	VDD + 0.3	V
Operating temperature <sup>v</sup>	Topr	-5	+60	°C
Storage temperature	Tstg	-10	+70	°C

<sup>v</sup> Humidity must be controlled to prevent the occurrence of condensation.

## ■ Recommended terminal voltage

Parameter	Symbol	Min.	Typ.	Max.	Unit
Supply voltage	VDD	4.75	5	5.25	V
Reference voltage	VREF	-	4.50	-	V

# Photodiode Detector with Signal Amplification XB8801R Series

## ■ Electrical characteristics [Ta = 21°C, VDD = 5 V]

Parameter	Symbol	Min.	Typ.	Max.	Unit	
<b>Digital</b>						
Clock pulse frequency <sup>vi</sup>	f(CLK)	40	–	4000	KHz	
Digital input voltage <sup>vii</sup>	High level	Vih	VDD–1.2	VDD	V	
	Low level	Vil	0	0	0.8	V
Digital input capacitance	Ci	–	40	–	pF	
Digital input leakage current	Ii	–10	+10	–	μA	
Digital output voltage <sup>viii</sup>	High level	Voh	VDD–0.75	VDD	V	
	Low level	Vol	0	0	0.4	V
Digital output load capacitance	Co	–	–	50	pF	
<b>Analog</b>						
Reference voltage input impedance	Rref	5	–	–	KΩ	
Charge amplifier feedback capacitance <sup>ix</sup>	High sensitivity	Cfhs	–	0.5	–	pF
	Low sensitivity	Cfls	–	1.5	–	pF
Video output impedance	Zv	–	–	1	KΩ	
Video output load capacitance	Cv	–	–	100	pF	
<b>Power</b>						
Power consumption	P	–	200	–	mW	

<sup>vi</sup> Video rate is 1/4 of clock pulse frequency f(CLK).

<sup>vii</sup> Digital inputs include CLK, RESET, EXTSP, VMS, SNS, and RS (see pin connections).

<sup>viii</sup> Digital outputs include Trig and EOS (see pin connections).

<sup>ix</sup> The sensitivity selection pin (see SNS in pin connections) controls the sensitivity of the detector by selecting whether the pixel charge amplifier feedback capacitance is Cfhs or Cfls. At Cfhs, the detector has high sensitivity. At Cfls, the detector has low sensitivity.

# Photodiode Detector with Signal Amplification XB8801R Series

■ Electro-optical characteristics [Ta = 21°C, VDD = 5 V, V(SNS) = 5 V (High sensitivity), 0 V (Low sensitivity)]

Parameter	Symbol	XB8801R (0.2 mm mode)			XB8801R (0.1 mm mode)			Unit
		Min.	Typ.	Max.	Min.	Typ.	Max.	
Output offset voltage <sup>x</sup>	Vos	–	VREF	–	–	VREF	–	V
Dark offset voltage <sup>xi</sup>	High sensitivity	–40	–	40	–40	–	40	mV
	Low sensitivity	–40	–	40	–40	–	40	
X-ray sensitivity <sup>xii</sup>	High sensitivity	–	900	–	–	450	–	V/R
	Low sensitivity	–	300	–	–	150	–	
Photo response non-uniformity <sup>xiii</sup>	PRNU	–10	–	10	–10	–	10	%
Noise <sup>xiv</sup>	High sensitivity	–	2.0	–	–	1.0	–	mVrms
	Low sensitivity	–	0.7	–	–	0.6	–	
Saturation output voltage	Vsat	3.0	–	–	3.0	–	–	V

<sup>x</sup> Video output is negative-going output with respect to the output offset voltage.

<sup>xi</sup> Difference between output signal under dark conditions and Vref with an integration time of 1 ms.

<sup>xii</sup> Measured with tube energy of 70KVp. Other scintillations with different sensitivity are available.


<sup>xiii</sup> Measured without scintillation. When the photodiode array is exposed to uniform light which is 50% of the saturation exposure, the Photo Response Non Uniformity (PRNU) is defined as follows:

$$PRNU = \Delta X \div X \times 100\%$$


where X is the average output of all elements and ΔX is the difference between the maximum and minimum outputs.

<sup>xiv</sup> Measured with a video data rate of 750 KHz and an integration time of 1 ms in dark state.


## ■ Output waveform of one element

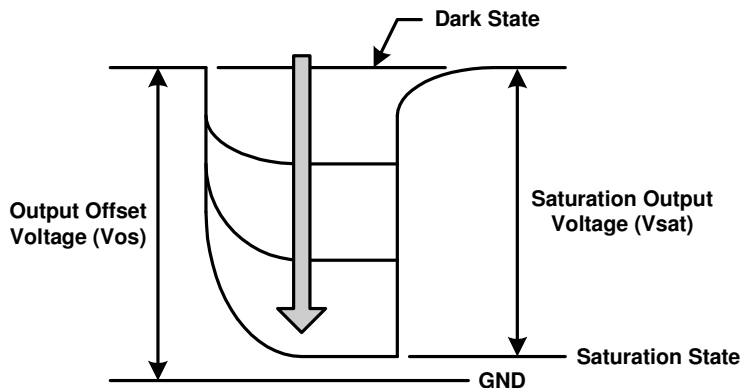


## ■ Block diagram

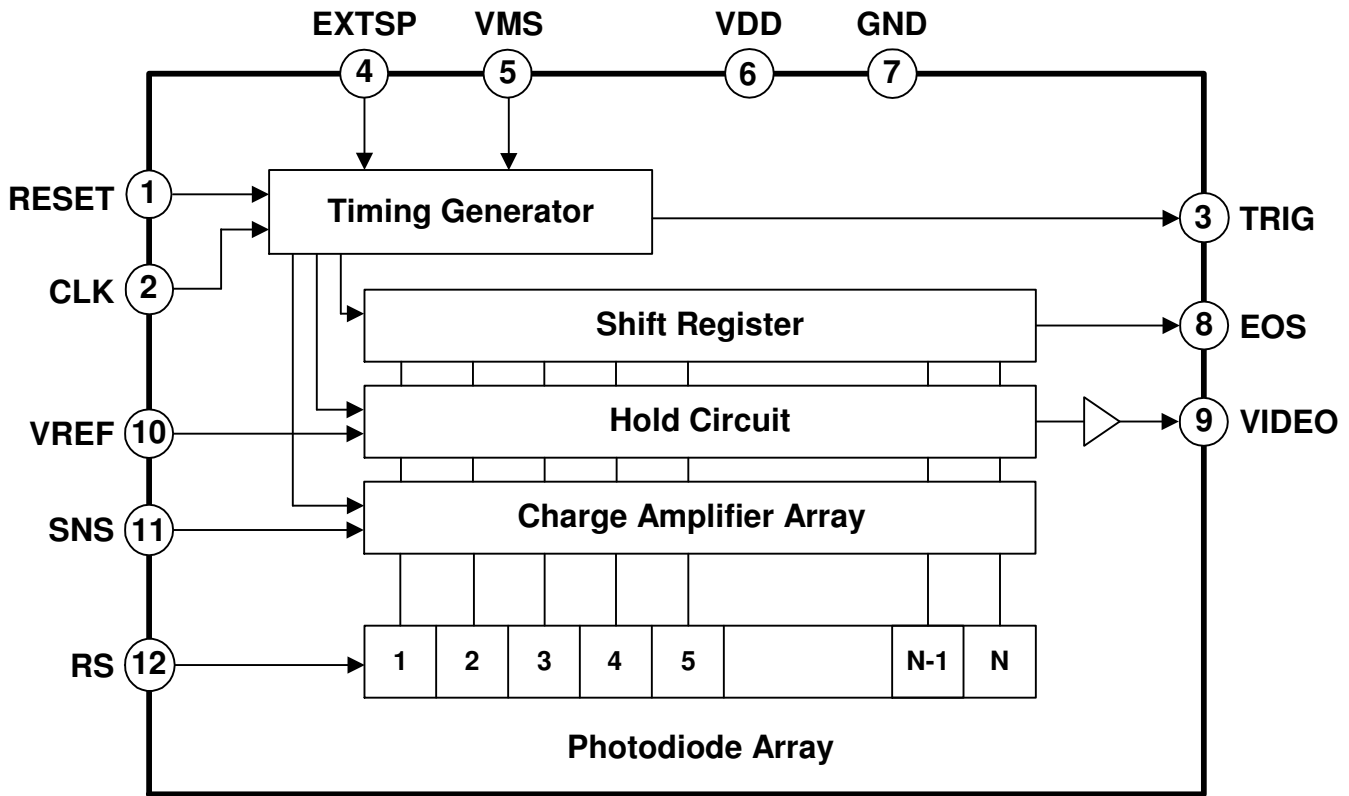

## ■ Timing chart<sup>xv</sup>

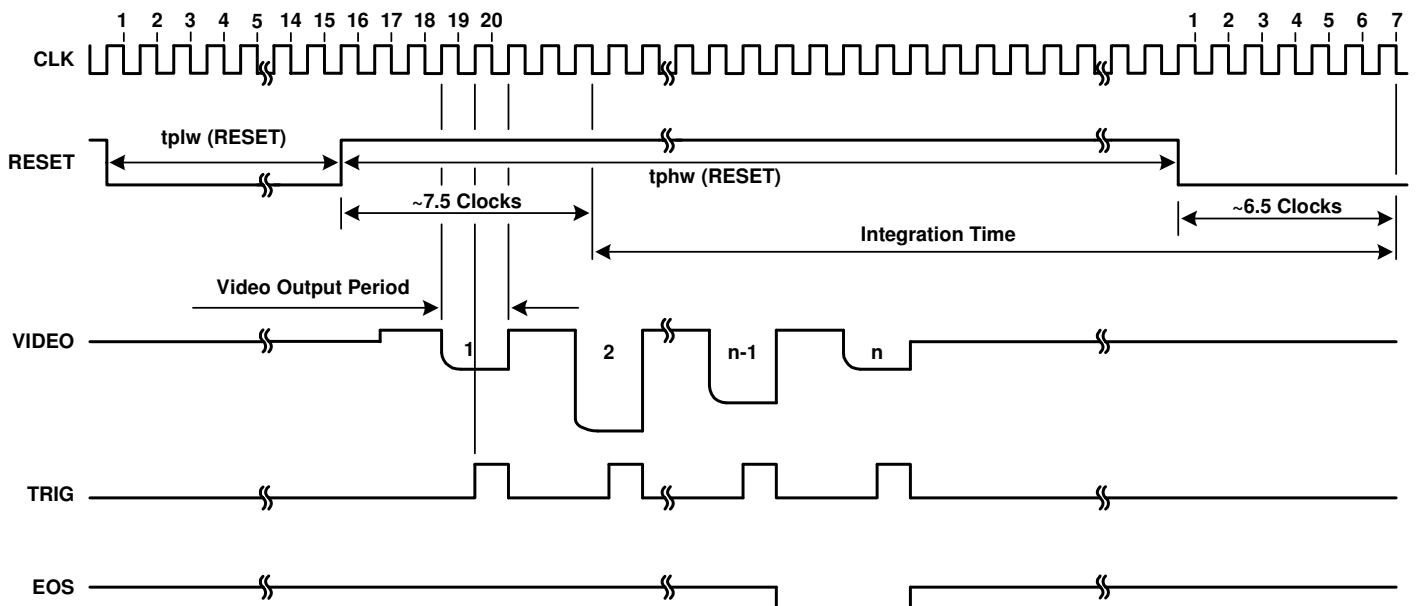

# Photodiode Detector with Signal Amplification XB8801R Series

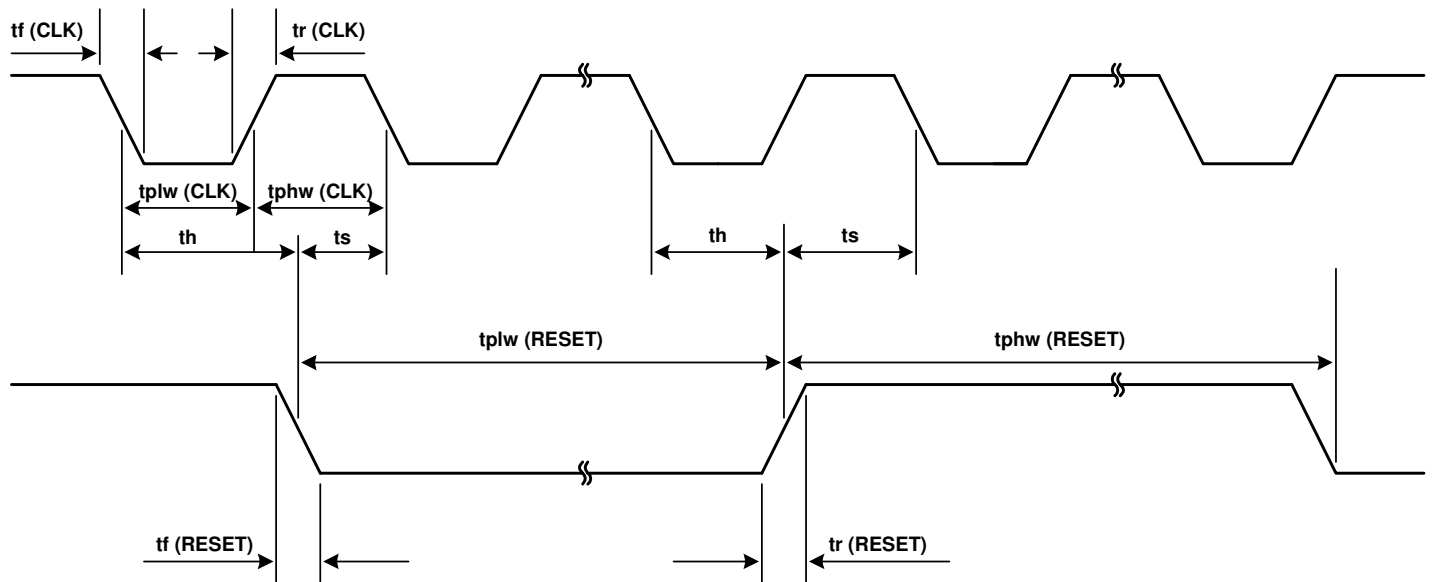

Parameter	Symbol	Min.	Typ.	Max.	Unit
Clock pulse low/high width	tplw (CLK), tphw (CLK)	100	–	–	ns
Clock pulse rise/fall times	tr (CLK), tf (CLK)	0	20	30	ns
Reset pulse low width <sup>xvi</sup>	tplw (RESET)	$12 / f(\text{CLK})$	$16 / f(\text{CLK})$	–	ms
Reset pulse high width <sup>xvii</sup>	tphw (RESET)	20	–	–	$\mu\text{s}$
Reset pulse rise/fall times	tr (RESET), tf (RESET)	0	20	30	ns
Reset pulse setup time <sup>xviii</sup>	ts	40	–	–	ns
Reset pulse hold time	th	40	–	–	ns

<sup>xv</sup> The falling of Video just before the 19<sup>th</sup> falling edge of CLK after transition of RESET from High to Low corresponds to the first pixel. The video output for the first pixel should be read around the 20<sup>th</sup> falling edge and before the subsequent rising CLK edge while Trig is high. After the first pixel, a pixel output appears on Video at every 4th clock cycle.

Care should be taken to prevent the rising edge of the RESET during the video output. Improper positioning of the RESET edges can lead to interference with the read-out.

The falling edge of the RESET should follow the last pixel of the previous line's read-out. Thus, one cycle of RESET pulses cannot be set shorter than the time equal to  $(17 + 4 \times N)$  clock cycles, where N is the number of pixels.

EOS of each detector chip appears during the output of the last pixel.


<sup>xvi</sup> RESET must stay Low [tplw(RESET)] for at least twelve clock cycles.

<sup>xvii</sup> The falling edge of RESET pulse determines the end of the integration time and the start of signal read-out, while the rising edge of the RESET pulse determines the start of the integration time. As a result, the signal-charge integration time can be controlled externally with the width of the RESET pulse [tphw(RESET)]. However, the charge integration does not start at the rise of a RESET pulse but starts at the 8<sup>th</sup> falling edge of clock after the rise of the RESET pulse and ends at the 7<sup>th</sup> falling edge of clock after the fall of the RESET pulse.

<sup>xviii</sup> The rising and falling edges of RESET must observe the setup and hold time requirements around the falling edges of CLK.

# Photodiode Detector with Signal Amplification XB8801R Series

## ■ Mechanical drawings<sup>xix</sup>

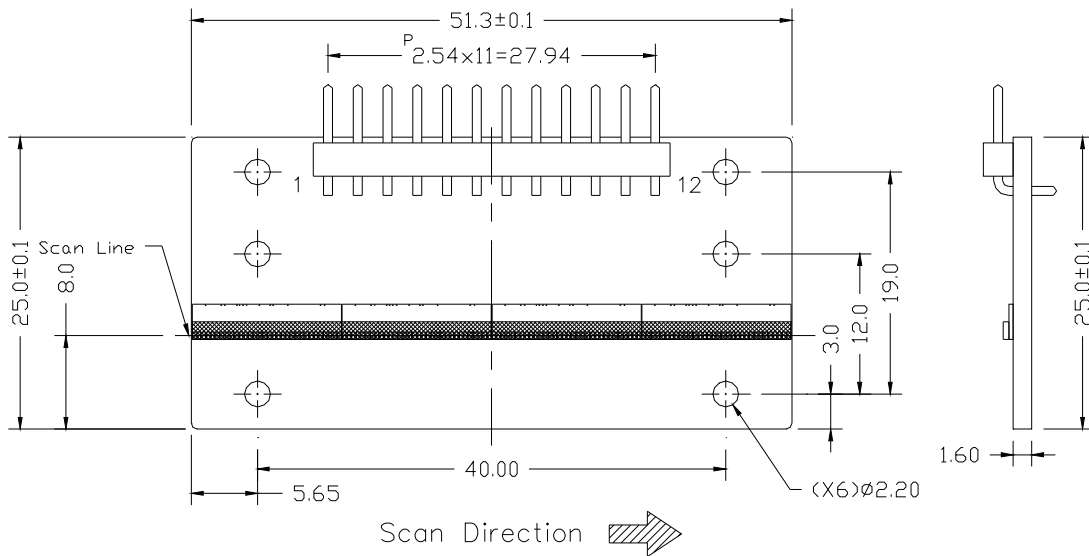

<sup>xix</sup> Part: 2-inch detector (XB8801R-2.0)

Units: Dimensions are in millimeters (mm).

Board: FR4 epoxy resin bonded glass fabric.

Connector: BISON Advanced Technology Corp., Ltd. ([www.bison-protect.com](http://www.bison-protect.com)), P101-RGP-060/030-12 or similar.

## ■ Pin connections

Pin No.	Symbol	Name	Description
1	RESET	Reset Pulse	Negative-going pulse input
2	CLK	Clock Pulse	Pulse input
3	TRIG	Trigger Pulse	Positive-going pulse output
4	EXTSP	External Start Pulse	Pulse/voltage input
5	VMS	Master/Slave Selection Voltage	Voltage input: See Master/slave selection voltage VMS and external start pulse EXTSP settings note
6	VDD	Supply Voltage	5-V supply voltage
7	GND	Ground	Common ground voltage
8	EOS	End of Scan	Negative-going pulse output
9	VIDEO	Video Output	Negative-going output with respect to VREF
10	VREF	Reference Voltage	Voltage input
11	SNS	Sensitivity Selection	Voltage input: High (VDD) for high sensitivity (C <sub>fs</sub> ) Low (GND) for low sensitivity (C <sub>fls</sub> )
12	RS	Resolution Selection	Voltage input: High (VDD) for 0.1-mm pitch Low (GND) for 0.2-mm pitch



## ■ Master/slave selection voltage VMS and external start pulse EXTSP settings

For most applications, multiple detectors are read out in parallel. To ensure parallel read out, set the VMS input of all detectors to VDD (A in the table below).

In applications where two or more linearly connected detectors are read out sequentially (in series), set the VMS input of the first detector to VDD and the VMS input of each subsequent (second and later) detector to GND while connecting the EXTSP input of each subsequent detector to the EOS output of each respective preceding detector (B in the table below). The CLK and RESET pulses should be shared among all detectors and the Video output terminals of all detectors are connected together. The maximum number of detectors that can be daisy-chained together is limited by the maximum Video output capacitance requirement.

	Operation Mode	VMS	EXTSP
A	Master configuration: Parallel readout: all detectors Serial readout: 1 <sup>st</sup> detector only	VDD	Don't care
B	Slave configuration: Serial readout: 2 <sup>nd</sup> and later detectors	GND	Preceding detector's EOS should be input

## ■ Readout circuit

In order to minimize noise and to maximize performance, an operational amplifier should be placed as close to the detector to amplify the Video signal.

Information furnished by X-Scan Imaging is believed to be accurate and reliable. However, no responsibility is assumed by X-Scan Imaging Corporation for its use. Users are responsible for their products and applications using X-Scan Imaging components. To minimize the risks associated with users' products and applications, users should provide adequate design and operating safeguards. No responsibility is assumed by X-Scan Imaging Corporation for any infringements of patents or other rights of third parties that may result from the use of the information. No license is granted by implication or otherwise under any patent or patent rights of X-Scan Imaging Corporation.

© 2014 X-Scan Imaging Corp.

107 Bonaventura Dr., San Jose, CA 95134, U.S.A.

Tel: +1 408 432 9888

Fax: +1 408 432 9889

[www.x-scanimaging.com](http://www.x-scanimaging.com)

## Linear X-Ray Photodiode Detector Array with Signal Amplification


# XB8804R Series

An X-Scan Imaging XB8804R linear detector array is constructed of CMOS silicon photodiode array detector chips mounted on a single printed-circuit board. The imaging circuit of each detector chip consists of a contiguous linear array of photodiodes, a timing generator, digital scanning shift register, an array of charge integrating amplifiers, sample-and-hold circuits, and signal amplification chain. Each detector array generates an End-Of-Scan (EOS) pulse that can be used to initiate the scanning of the next detector array. Thus, a longer, continuous detector array can be formed from a daisy chain of smaller detector arrays.

For x-ray scanning applications, a scintillator material tailored to the user's application is attached to the surface of the detector array to convert x-ray photons into visible light for detection by the photodiode array. The XB8804R photodiode array is uniquely designed and processed to reduce radiation damage from the x-ray flux. The signal processing circuits are positioned 2 mm away from the photodiode array. These circuits are shielded from direct x-ray radiation using an external heavy-metal shield. The precision alignment of the metal shield with respect to the signal processing circuits is performed at the factory using a special molded housing and chip-on-board (COB) technology.

### Key Features

- Large element pitch with two selectable resolution modes: 0.4 mm and 0.8 mm
- Different array lengths available:
  - 2.0 inches (128 pixels at 0.4 mm, 64 pixels at 0.8 mm),
  - 4.0 inches (256 pixels at 0.4 mm, 128 pixels at 0.8 mm),
  - etc.
- 5-V power supply operation
- Simultaneous integration by using an array of charge integrating amplifiers
- Sequential readout with a digital scanning shift register (Data rate: 1 MHz max.)
- Integrated CDS circuits allow low noise and wide dynamic range up to > 4000
- User-specified scintillator material GOS:Tb, CsI:Tl, CdWO<sub>4</sub>, etc.
- Extended radiation hardness lifetimes

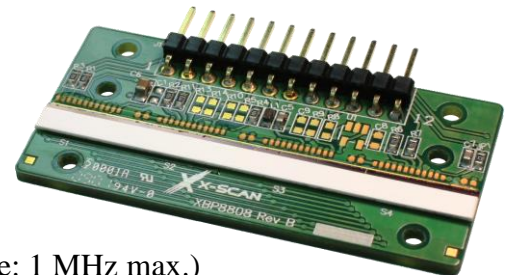

### Applications

- Linear x-ray imaging for industrial and food inspection
- Linear x-ray imaging for homeland security and contraband screening

## ■ Mechanical specifications

Parameter	Symbol <sup>i</sup>	XB8804R-2.0 <sup>ii</sup> (low resolution 0.8-mm mode) <sup>iii</sup>	XB8804R-2.0 (high resolution 0.4-mm mode) <sup>iv</sup>	XB8804R-4.0 (low resolution 0.8-mm mode)	XB8804R-4.0 (high resolution 0.4-mm mode)	Unit
Element pitch	P	0.8	0.4	0.8	0.4	mm
Element diffusion width	W	0.76	0.36	0.76	0.36	mm
Element height	H	1.2	0.6	1.2	0.6	mm
Number of elements	–	64	128	128	256	–
Active area length	–	51.2	51.2	102.4	102.4	mm


<sup>i</sup> Refer to enlarged view of active area figure.

<sup>ii</sup> 2-inch and 4-inch long detector are specified here. Other lengths (at multiples of 0.5 inches) are available upon special request.

<sup>iii</sup> When RS (pin 12) is tied to GND, the detector operates in the low 0.8-mm resolution mode. There are 64 pixels in a 2-inch detector (XB8804R-2.0) in 0.8-mm mode. There are 128 pixels in a 4-inch detector (XB8804R-4.0) in 0.8-mm mode.

<sup>iv</sup> When RS (pin 12) is tied to VDD, the detector operates in the high 0.4-mm resolution mode. There are 128 pixels in a 2-inch detector (XB8804R-2.0) in 0.4-mm mode. There are 256 pixels in a 4-inch detector (XB8804R-4.0) in 0.4-mm mode.

## ■ Enlarged view of active area

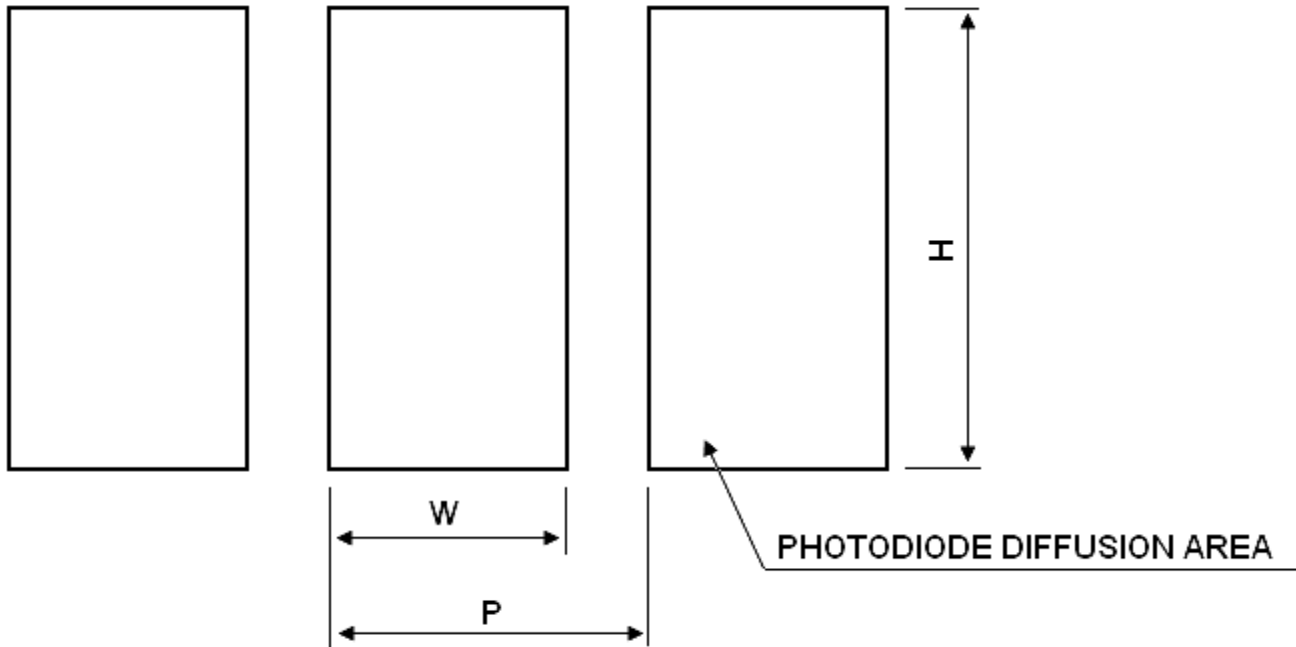

## ■ Absolute maximum ratings



*Electronic device sensitive to electrostatic discharge and x-ray radiation.* Although this device features ESD protection circuitry, permanent damage ranging from subtle performance degradation to complete device failure may occur on devices subjected to high-energy electrostatic discharges. Furthermore, although this device features radiation shielding for protection against anticipated x-ray radiation, permanent damage ranging from subtle performance degradation to complete device failure may occur on devices subjected to unanticipated x-ray radiation (e.g. off-axis or extremely high energy radiation). Therefore, proper precautions against ESD and x-ray radiation must be taken during handling and storage of this device.

Parameter	Symbol	Min	Max	Unit
Supply voltage	VDD	-0.3	+6	V
Reference voltage	VREF	-0.3	VDD + 0.3	V
Digital input voltages		-0.3	VDD + 0.3	V
Operating temperature <sup>v</sup>	Topr	-5	+60	°C
Storage temperature	Tstg	-10	+70	°C

<sup>v</sup> Humidity must be controlled to prevent the occurrence of condensation.

## ■ Recommended terminal voltage

Parameter	Symbol	Min.	Typ.	Max.	Unit
Supply voltage	VDD	4.75	5	5.25	V
Reference voltage <sup>vi</sup>	VREF	–	4.50	–	V

<sup>vi</sup> Reference voltage changed from 3.0V at previous version of XB8808 to 4.5V at current 0.8mm mode.

■ Electrical characteristics [Ta = 21°C, VDD = 5 V]

Parameter	Symbol	Min.	Typ.	Max.	Unit	
<b>Digital</b>						
Clock pulse frequency <sup>vii</sup>	f(CLK)	40	–	4000	KHz	
Digital input voltage <sup>viii</sup>	High level	Vih	VDD–1.2	VDD	V	
	Low level	Vil	0	0	0.8	V
Digital input capacitance	Ci	–	40	–	pF	
Digital input leakage current	Ii	–10	+10	–	μA	
Digital output voltage <sup>ix</sup>	High level	Voh	VDD–0.75	VDD	V	
	Low level	Vol	0	0	0.4	V
Digital output load capacitance	Co	–	–	50	pF	
<b>Analog</b>						
Reference voltage input impedance	Rref	–	5	–	KΩ	
Charge amplifier feedback capacitance <sup>x</sup>	High sensitivity	Cfhs	–	0.5	–	pF
	Low sensitivity	Cfls	–	1.5	–	pF
Video output impedance	Zv	–	1	–	KΩ	
Video output load capacitance	Cv	–	–	100	pF	
<b>Power</b>						
Power consumption	P	–	200	–	mW	

<sup>vii</sup> Video rate is 1/4 of clock pulse frequency f(CLK).

<sup>viii</sup> Digital inputs include CLK, RESET, EXTSP, VMS, SNS, and RS (see pin connections).

<sup>ix</sup> Digital outputs include Trig and EOS (see pin connections).

<sup>x</sup> The sensitivity selection pin (see SNS in pin connections) controls the sensitivity of the detector by selecting whether the pixel charge amplifier feedback capacitance is Cfhs or Cfls. At Cfhs, the detector has high sensitivity. At Cfls, the detector has low sensitivity.

# Photodiode Detector with Signal Amplification XB8804R Series

■ **Electro-optical characteristics** [Ta = 21°C, VDD = 5 V, V(SNS) = 5 V (High sensitivity), 0 V (Low sensitivity)]

Parameter	Symbol	XB8804R (0.8 mm mode)			XB8804R (0.4 mm mode)			Unit
		Min.	Typ.	Max.	Min.	Typ.	Max.	
Output offset voltage <sup>xi</sup>	Vos	–	VREF	–	–	VREF	–	V
Dark offset voltage <sup>xii</sup>	High sensitivity	–40	–	40	–40	–	40	mV
	Low sensitivity	–40	–	40	–40	–	40	
X-ray sensitivity <sup>xiii</sup>	High sensitivity	–	9600 (to be revised downward)	–	–	2400	–	V/R
	Low sensitivity	–	3200 (to be revised downward)	–	–	800	–	
Photo response non-uniformity <sup>xiv</sup>	PRNU	–10	–	10	–10	–	10	%
Noise <sup>xv</sup>	High sensitivity	–	2.0	–	–	1.0	–	mVrms
	Low sensitivity	–	0.7	–	–	0.6	–	
Saturation output voltage	Vsat	3.0	–	–	3.0	–	–	V

<sup>xi</sup> Video output is negative-going output with respect to the output offset voltage.

<sup>xii</sup> Difference between output signal under dark conditions and Vref with an integration time of 1 ms.

<sup>xiii</sup> Measured with tube energy of 70KVp. Other scintillations with different sensitivity are available.


<sup>xiv</sup> Measured without scintillation. When the photodiode array is exposed to uniform light which is 50% of the saturation exposure, the Photo Response Non Uniformity (PRNU) is defined as follows:

$$PRNU = \Delta X \div X \times 100\%$$


where X is the average output of all elements and ΔX is the difference between the maximum and minimum outputs.

<sup>xv</sup> Measured with a video data rate of 750 KHz and an integration time of 1 ms in dark state.


■ **Output waveform of one element**

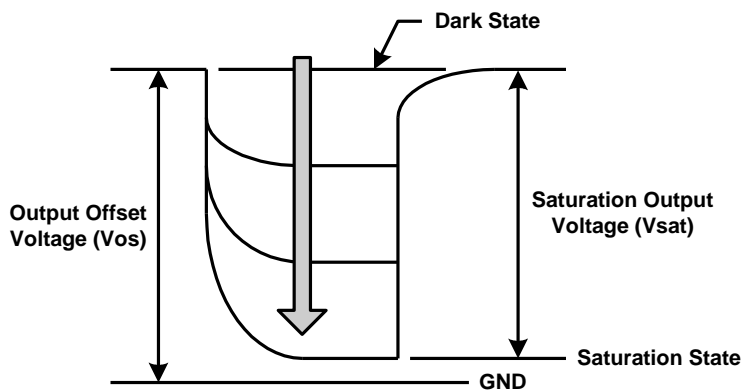


## ■ Block diagram

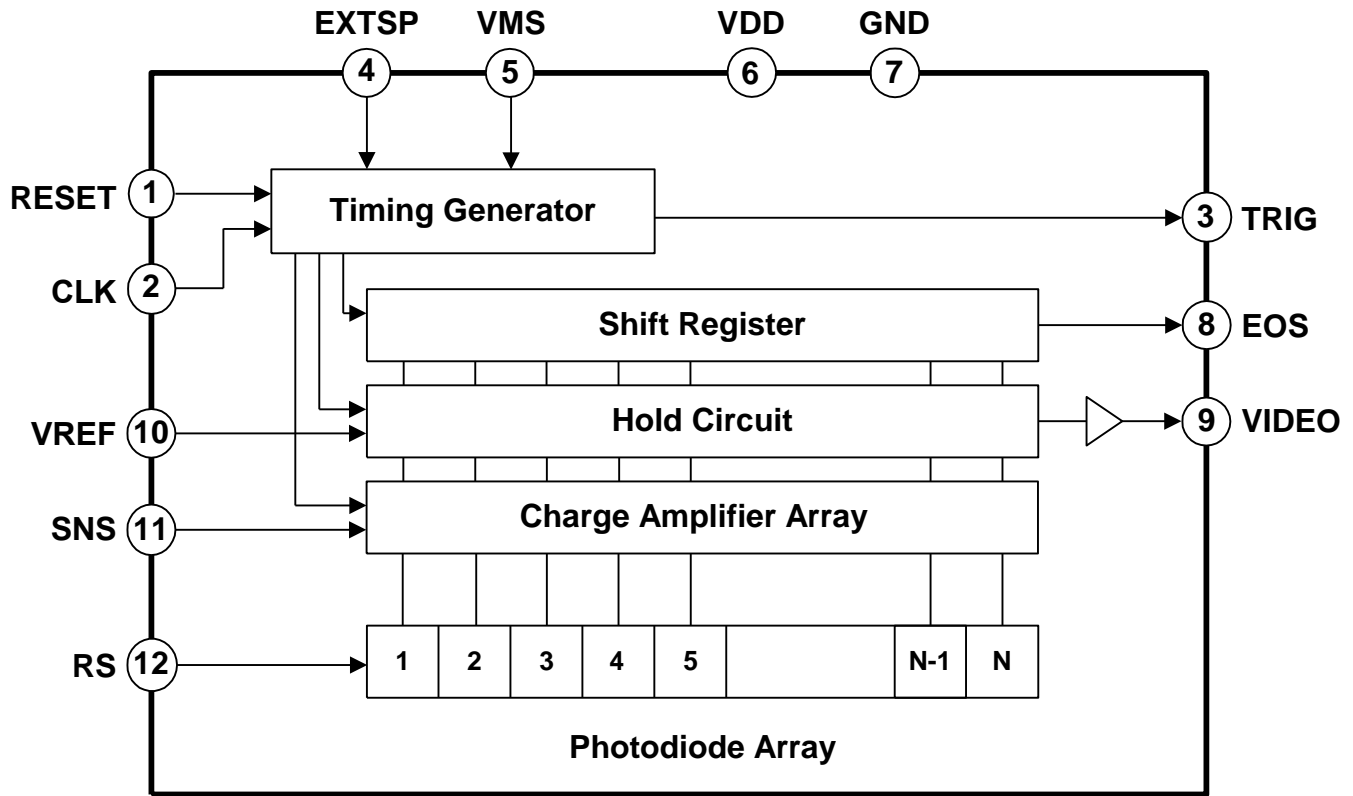

## ■ Timing chart<sup>xvi</sup>

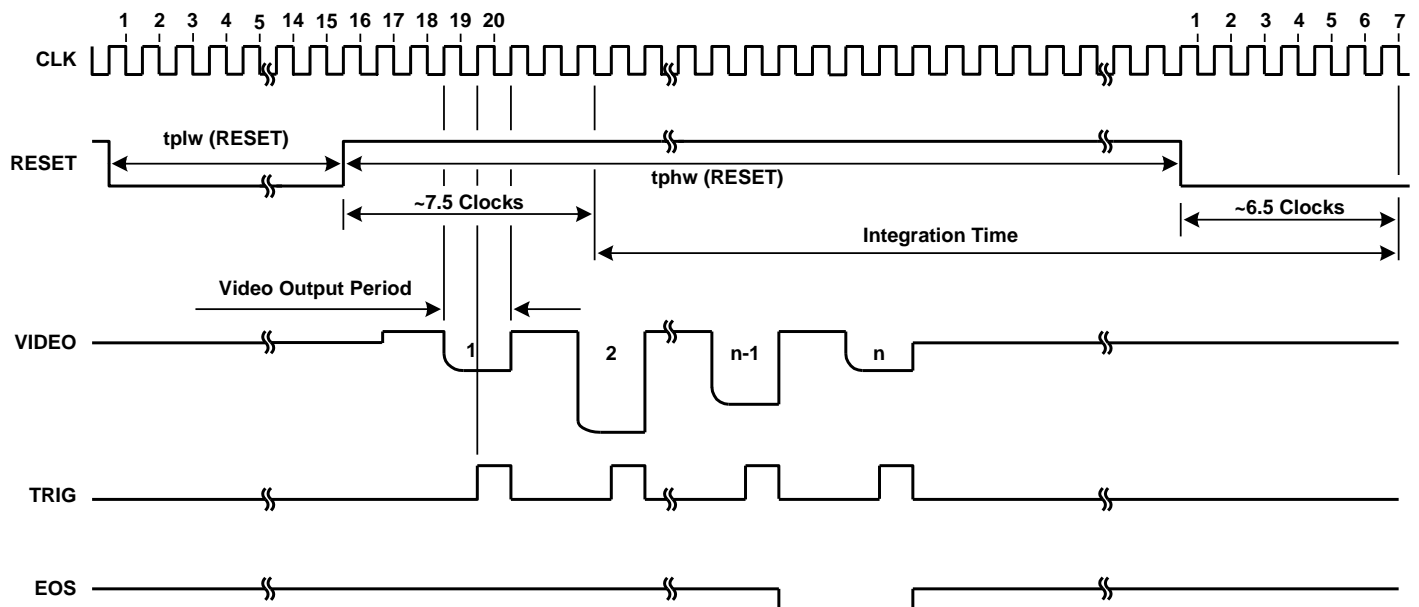

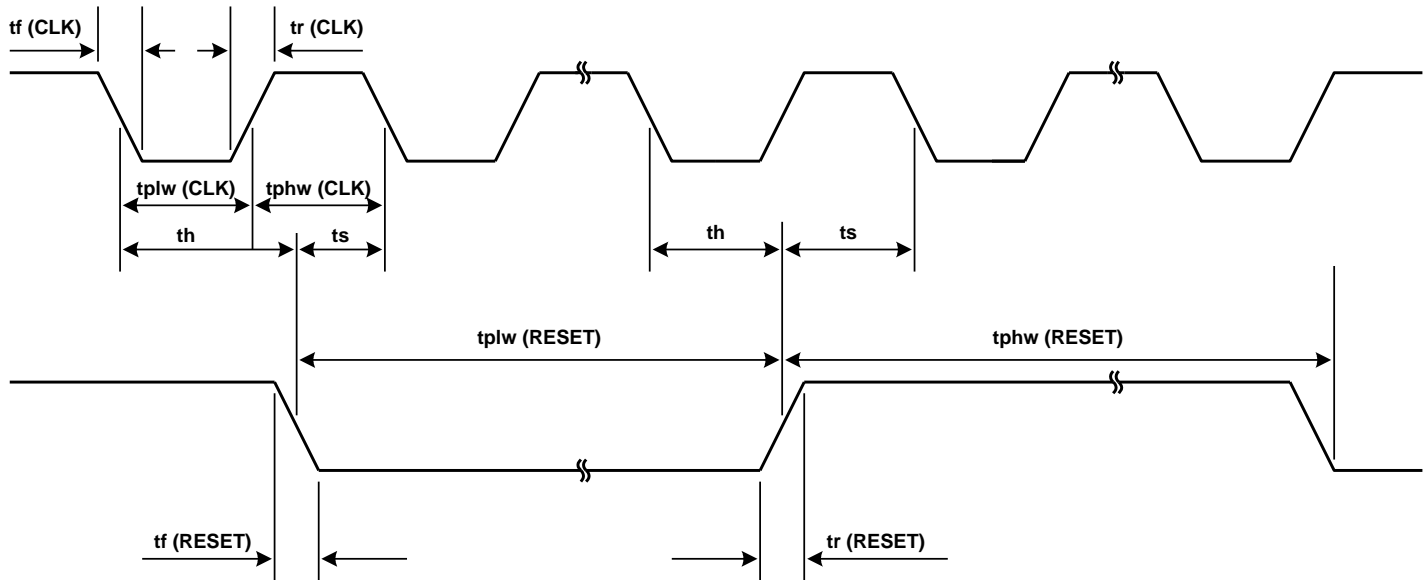

Parameter	Symbol	Min.	Typ.	Max.	Unit
Clock pulse low/high width	tplw (CLK), tphw (CLK)	100	–	–	ns
Clock pulse rise/fall times	tr (CLK), tf (CLK)	0	20	30	ns
Reset pulse low width <sup>xvii</sup>	tplw (RESET)	12 / f(CLK)	16 / f(CLK)	–	ms
Reset pulse high width <sup>xviii</sup>	tphw (RESET)	20	–	–	μs
Reset pulse rise/fall times	tr (RESET), tf (RESET)	0	20	30	ns
Reset pulse setup time <sup>xix</sup>	ts	40	–	–	ns
Reset pulse hold time	th	40	–	–	ns

<sup>xvi</sup> The falling of Video just before the 19<sup>th</sup> falling edge of CLK after transition of RESET from High to Low corresponds to the first pixel. The video output for the first pixel should be read around the 20<sup>th</sup> falling edge and before the subsequent rising CLK edge while Trig is high. After the first pixel, a pixel output appears on Video at every 4th clock cycle.

Care should be taken to prevent the rising edge of the RESET during the video output. Improper positioning of the RESET edges can lead to interference with the read-out.

The falling edge of the RESET should follow the last pixel of the previous line's read-out. Thus, one cycle of RESET pulses cannot be set shorter than the time equal to  $(17 + 4 \times N)$  clock cycles, where N is the number of pixels.

EOS of each detector chip appears during the output of the last pixel.


<sup>xvii</sup> RESET must stay Low [tplw(RESET)] for at least twelve clock cycles.

<sup>xviii</sup> The falling edge of RESET pulse determines the end of the integration time and the start of signal read-out, while the rising edge of the RESET pulse determines the start of the integration time. As a result, the signal-charge integration time can be controlled externally with the width of the RESET pulse [tphw(RESET)]. However, the charge integration does not start at the rise of a RESET pulse but starts at the 8<sup>th</sup> falling edge of clock after the rise of the RESET pulse and ends at the 7<sup>th</sup> falling edge of clock after the fall of the RESET pulse.

<sup>xix</sup> The rising and falling edges of RESET must observe the setup and hold time requirements around the falling edges of CLK.



## ■ Mechanical drawings<sup>xx</sup>

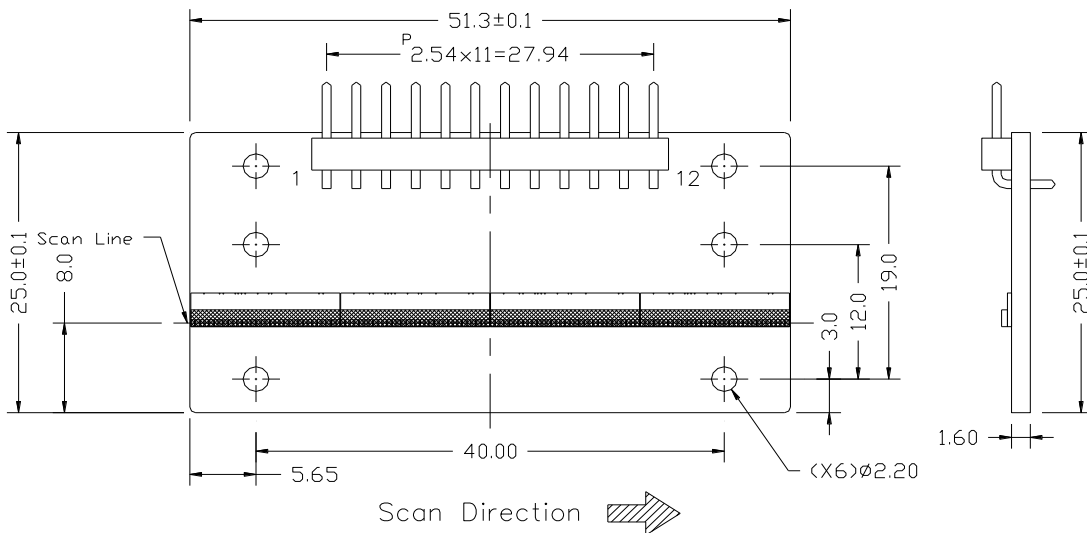

<sup>xx</sup> Part: 2-inch detector (XB8804R-2.0). For 0.8mm mode, scan line is 7.7mm from board edge.

Units: Dimensions are in millimeters (mm).

Board: FR4 epoxy resin bonded glass fabric.

Connector: BISON Advanced Technology Corp., Ltd. ([www.bison-protech.com](http://www.bison-protech.com)), P101-RGP-060/030-12 or similar.

## ■ Pin connections

Pin No.	Symbol	Name	Description
1	RESET	Reset Pulse	Negative-going pulse input
2	CLK	Clock Pulse	Pulse input
3	TRIG	Trigger Pulse	Positive-going pulse output
4	EXTSP	External Start Pulse	Pulse/voltage input
5	VMS	Master/Slave Selection Voltage	Voltage input: See Master/slave selection voltage VMS and external start pulse EXTSP settings note
6	VDD	Supply Voltage	5-V supply voltage
7	GND	Ground	Common ground voltage
8	EOS	End of Scan	Negative-going pulse output
9	VIDEO	Video Output	Negative-going output with respect to VREF
10	VREF	Reference Voltage	Voltage input
11	SNS	Sensitivity Selection	Voltage input: High (VDD) for high sensitivity (C <sub>fs</sub> ) Low (GND) for low sensitivity (C <sub>fls</sub> )
12	RS	Resolution Selection	Voltage input: (Disabled for 0.8mm mode only; don't care) High (VDD) for 0.4-mm pitch Low (GND) for 0.8-mm pitch

## ■ Master/slave selection voltage VMS and external start pulse EXTSP settings

For most applications, multiple detectors are read out in parallel. To ensure parallel read out, set the VMS input of all detectors to VDD (A in the table below).

In applications where two or more linearly connected detectors are read out sequentially (in series), set the VMS input of the first detector to VDD and the VMS input of each subsequent (second and later) detector to GND while connecting the EXTSP input of each subsequent detector to the EOS output of each respective preceding detector (B in the table below). The CLK and RESET pulses should be shared among all detectors and the Video output terminals of all detectors are connected together. The maximum number of detectors that can be daisy-chained together is limited by the maximum Video output capacitance requirement.

	Operation Mode	VMS	EXTSP
A	Master configuration: Parallel readout: all detectors Serial readout: 1 <sup>st</sup> detector only	VDD	Don't care
B	Slave configuration: Serial readout: 2 <sup>nd</sup> and later detectors	GND	Preceding detector's EOS should be input

## ■ Readout circuit

In order to minimize noise and to maximize performance, an operational amplifier should be placed as close to the detector to amplify the Video signal.

Information furnished by X-Scan Imaging is believed to be accurate and reliable. However, no responsibility is assumed by X-Scan Imaging Corporation for its use. Users are responsible for their products and applications using X-Scan Imaging components. To minimize the risks associated with users' products and applications, users should provide adequate design and operating safeguards. No responsibility is assumed by X-Scan Imaging Corporation for any infringements of patents or other rights of third parties that may result from the use of the information. No license is granted by implication or otherwise under any patent or patent rights of X-Scan Imaging Corporation.

© 2014 X-Scan Imaging Corp.

Tel: +1 408 432 9888

107 Bonaventura Dr., San Jose, CA 95134, U.S.A.  
Fax: +1 408 432 9889

[www.x-scanimaging.com](http://www.x-scanimaging.com)

## Linear X-Ray Photodiode Detector Array with Signal Amplification


# XB8816R Series

An X-Scan Imaging XB8816R linear detector array is constructed of CMOS silicon photodiode array detector chips mounted on a single printed-circuit board. The imaging circuit of each detector chip consists of a contiguous linear array of photodiodes, a timing generator, digital scanning shift register, an array of charge integrating amplifiers, sample-and-hold circuits, and signal amplification chain. Each detector array generates an End-Of-Scan (EOS) pulse that can be used to initiate the scanning of the next detector array. Thus, a longer, continuous detector array can be formed from a daisy chain of smaller detector arrays.

For x-ray scanning applications, a scintillator material tailored to the user's application is attached to the surface of the detector array to convert x-ray photons into visible light for detection by the photodiode array. The XB8816R photodiode array is uniquely designed and processed to reduce radiation damage from the x-ray flux. The signal processing circuits are positioned 2 mm away from the photodiode array. These circuits are shielded from direct x-ray radiation using an external heavy-metal shield. The precision alignment of the metal shield with respect to the signal processing circuits is performed at the factory using a special molded housing and chip-on-board (COB) technology.

### Key Features

- Large element pitch resolution of 1.6 mm
- Different array lengths available:
  - 2.0 inches (32 pixels)
  - 4.0 inches (64 pixels)
  - etc.
- 5-V power supply operation
- Simultaneous integration by using an array of charge integrating amplifiers
- Sequential readout with a digital scanning shift register (Data rate: 1 MHz max.)
- Integrated CDS circuits allow low noise and wide dynamic range up to > 4000
- User-specified scintillator material GOS:Tb, CsI:Tl, CdWO<sub>4</sub>, etc.
- Extended radiation hardness lifetimes

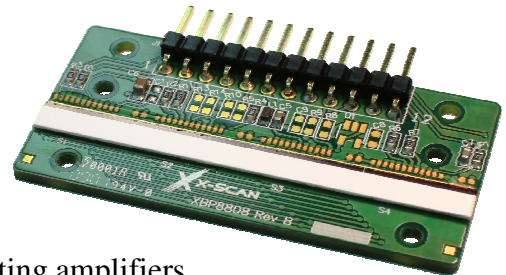

### Applications

- Linear x-ray imaging for industrial and food inspection
- Linear x-ray imaging for homeland security and cargo screening

## ■ Mechanical specifications


Parameter	Symbol <sup>i</sup>	XB8816R-2.0 <sup>ii</sup>	XB8816R-4.0 <sup>iii</sup>	Unit
Element pitch	P	1.6	1.6	mm
Element diffusion width	W	1.565	1.565	mm
Element height	H	2.4	2.4	mm
Number of elements	–	32	64	–
Active area length	–	51.2	102.4	mm

<sup>i</sup> Refer to enlarged view of active area figure.

<sup>ii</sup> 2-inch long detector is specified here. Other lengths (at multiples of 0.5 inches) are available upon request.

<sup>iii</sup> 4-inch long detector is specified here. Other lengths (at multiples of 0.5 inches) are available upon request.

## ■ Enlarged view of active area

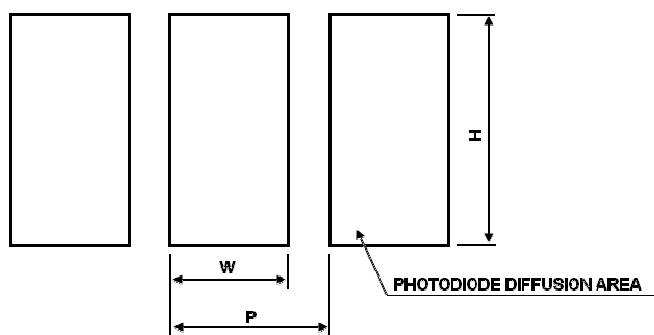

## ■ Absolute maximum ratings



*Electronic device sensitive to electrostatic discharge and x-ray radiation.* Although this device features ESD protection circuitry, permanent damage ranging from subtle performance degradation to complete device failure may occur on devices subjected to high-energy electrostatic discharges. Furthermore, although this device features radiation shielding for protection against anticipated x-ray radiation, permanent damage ranging from subtle performance degradation to complete device failure may occur on devices subjected to unanticipated x-ray radiation (e.g. off-axis or extremely high energy radiation). Therefore, proper precautions against ESD and x-ray radiation must be taken during handling and storage of this device.

Parameter	Symbol	Min	Max	Unit
Supply voltage	VDD	–0.3	+6	V
Reference voltage	VREF	–0.3	VDD + 0.3	V
Digital input voltages		–0.3	VDD + 0.3	V
Operating temperature <sup>iv</sup>	T <sub>opr</sub>	–5	+60	°C
Storage temperature	T <sub>stg</sub>	–10	+70	°C

<sup>iv</sup> Humidity must be controlled to prevent the occurrence of condensation.

## ■ Recommended terminal voltage

Parameter	Symbol	Min.	Typ.	Max.	Unit
Supply voltage	VDD	4.75	5	5.25	V
Reference voltage	VREF	–	4.50	–	V

## ■ Electrical characteristics [Ta = 21°C, VDD = 5 V]

Parameter	Symbol	Min.	Typ.	Max.	Unit	
<b>Digital</b>						
Clock pulse frequency <sup>v</sup>	f(CLK)	40	–	4000	KHz	
Digital input voltage <sup>vi</sup>	High level	Vih	VDD–1.00	VDD	V	
	Low level	Vil	0	0	0.4	V
Digital input capacitance	Ci	–	40	–	pF	
Digital input leakage current	Ii	–10	+10	–	μA	
Digital output voltage <sup>vii</sup>	High level	Voh	VDD–0.75	VDD	V	
	Low level	Vol	0	0	0.4	V
Digital output load capacitance	Co	–	–	50	pF	
<b>Analog</b>						
Reference voltage input impedance <sup>viii</sup>	Rref	–	5	–	KΩ	
Charge amplifier feedback capacitance <sup>ix</sup> (PG2:PG1)	0:0	Cf00	–	16	–	pF
	0:1	Cf01	–	8	–	pF
	1:0	Cf10	–	4	–	pF
	1:1	Cf11	–	2	–	pF
Video output impedance	Zv	–	1	–	KΩ	
Video output load capacitance	Cv	–	–	100	pF	
<b>Power</b>						
Power consumption	P	–	200	–	mW	

<sup>v</sup> Video rate is 1/4 of clock pulse frequency f (CLK).

<sup>vi</sup> Digital inputs include CLK, RESET, EXTSP, PG2, and PG1.

<sup>vii</sup> Digital outputs include Trig and EOS (see pin connections).

<sup>viii</sup> Reference voltage input impedance is dependent on length of detector. For a 2-inch detector (XB8816R-2.0), the input impedance is 5 KΩ.

<sup>ix</sup> The sensitivity selection pins (see PG2:PG1 pin connections) control the sensitivity of the detector by selecting the pixel charge amplifier feedback capacitance from Cf00 to Cf11. At Cf00, the detector has lowest sensitivity. At Cf11, the detector has highest sensitivity.

## ■ Radio-opto-electrical characteristics [Ta = 21°C, VDD = 5 V]

Parameter	Symbol	XB8816R (1.6mm)			Unit
		Min.	Typ.	Max.	
Output offset voltage <sup>x</sup>	Vos	–	VREF	–	V
Dark offset voltage <sup>xi</sup>	Vd	–40	–	40	mV
X-ray sensitivity <sup>xii</sup> (PG2:PG1)	S	1:1	12000	–	V/R
		1:0	6000	–	
		0:1	3000	–	
		0:0	1500	–	
Photo response non-uniformity <sup>xiii</sup>	PRNU	–10	–	10	%
Noise <sup>xiv</sup>	N	PG2:PG1 = 0:0	0.75	–	mVrms
		PG2:PG1 = 1:1	2.00	–	
Saturation output voltage	Vsat	3.0	–	–	V

<sup>x</sup> Video output is negative-going output with respect to the output offset voltage.

<sup>xi</sup> Difference between output signal under dark conditions and Vref with an integration time of 1 ms.

<sup>xii</sup> Sensitivity is dependent on x-ray source. Other scintillations with different sensitivity are available.


<sup>xiii</sup> Measured without scintillation. When the photodiode array is exposed to uniform light which is 50% of the saturation exposure, the Photo Response Non Uniformity (PRNU) is defined as follows:

$$PRNU = \Delta X \div X \times 100\%$$


where X is the average output of all elements and ΔX is the difference between the maximum and minimum outputs.

<sup>xiv</sup> Measured with a video data rate of 750 KHz and an integration time of 1 ms in dark state.


## ■ Output waveform of one element

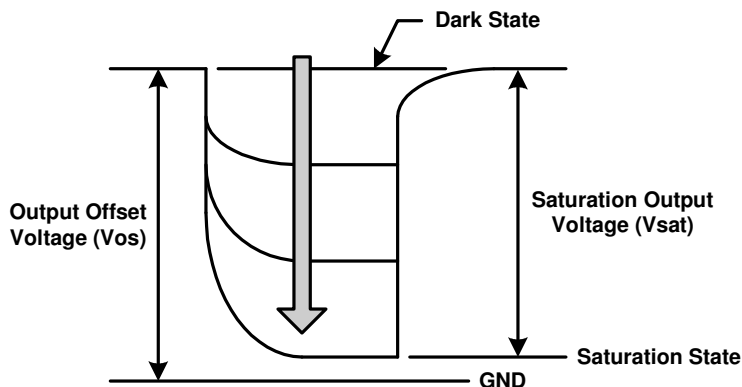


## ■ Block diagram

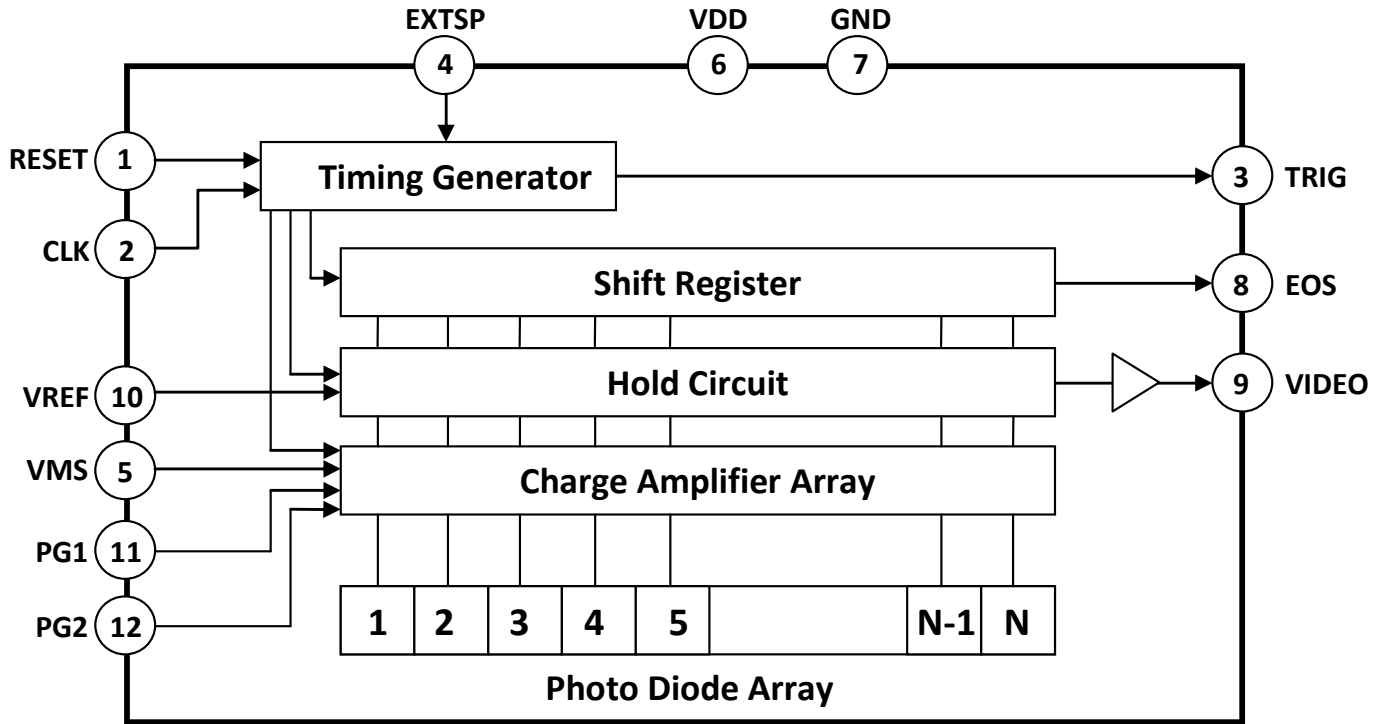

## ■ Timing chart<sup>xv</sup>

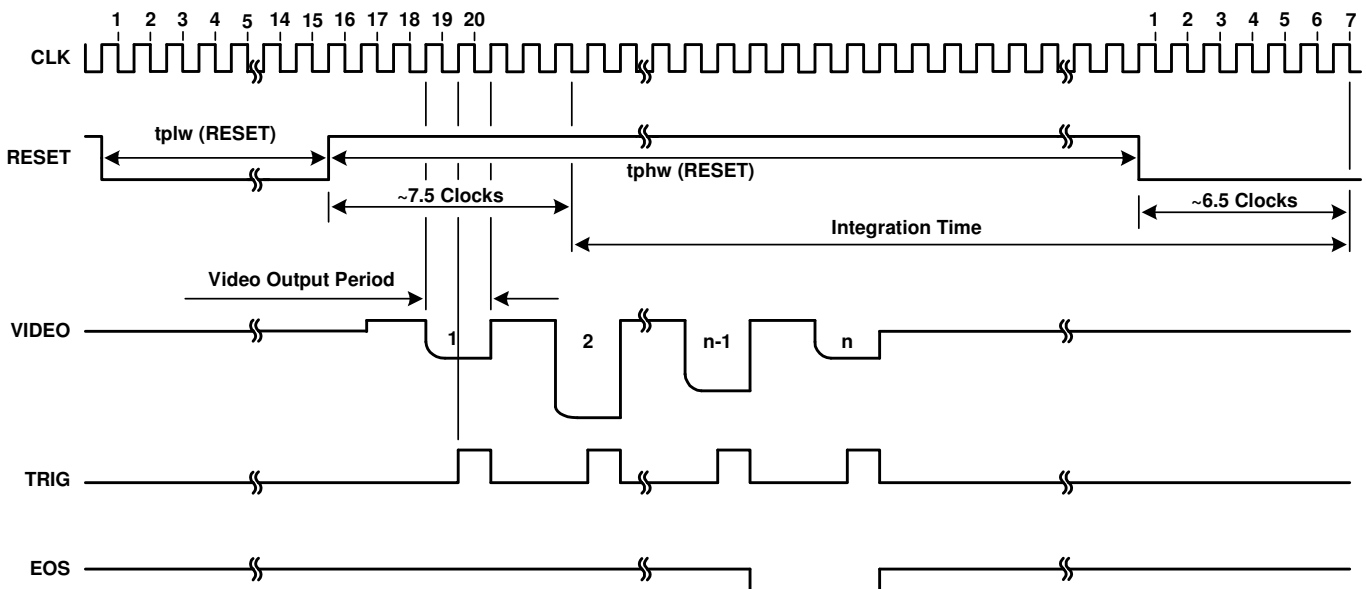

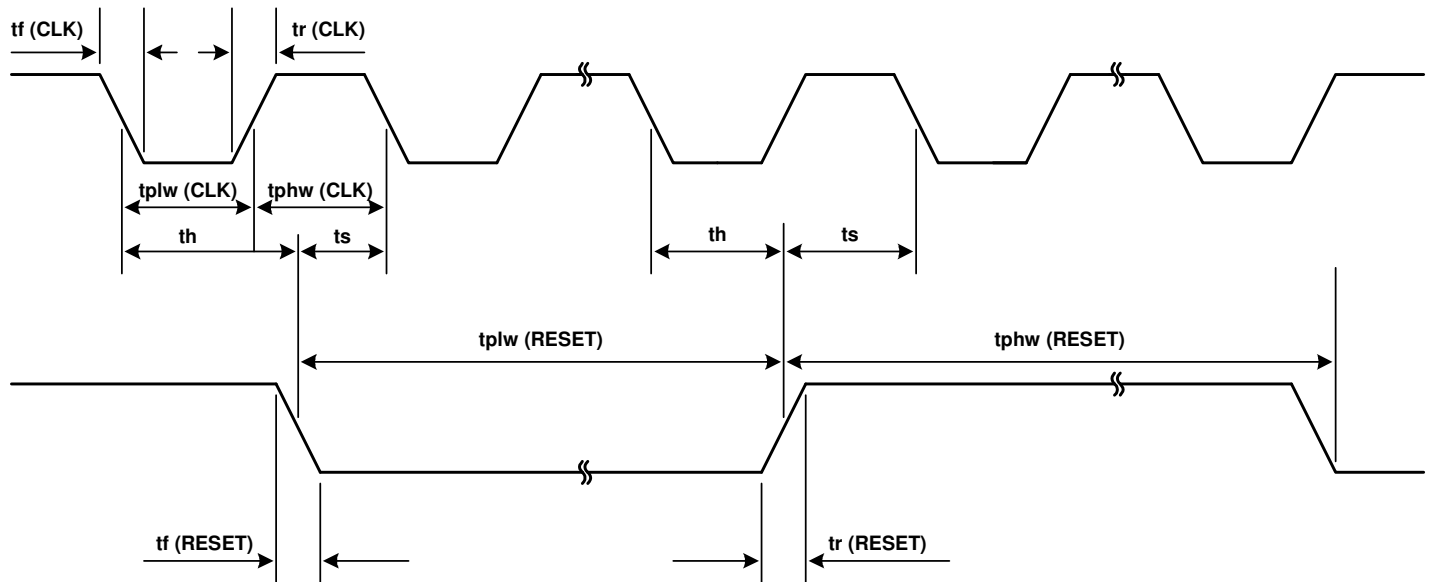

Parameter	Symbol	Min.	Typ.	Max.	Unit
Clock pulse low/high width	tplw (CLK), tphw (CLK)	100	–	–	ns
Clock pulse rise/fall times	tr (CLK), tf (CLK)	0	20	30	ns
Reset pulse low width <sup>xvi</sup>	tplw (RESET)	12 / f(CLK)	16 / f(CLK)	–	ms
Reset pulse high width <sup>xvii</sup>	tphw (RESET)	20	–	–	μs
Reset pulse rise/fall times	tr (RESET), tf (RESET)	0	20	30	ns
Reset pulse setup time <sup>xviii</sup>	ts	40	–	–	ns
Reset pulse hold time	th	40	–	–	ns

<sup>xv</sup> The falling of Video just before the 19<sup>th</sup> falling edge of CLK after transition of RESET from High to Low corresponds to the first pixel. The video output for the first pixel should be read around the 20<sup>th</sup> falling edge and before the subsequent rising CLK edge while Trig is high. After the first pixel, a pixel output appears on Video at every 4th clock cycle.

Care should be taken to prevent the rising edge of the RESET during the video output. Improper positioning of the RESET edges can lead to interference with the read-out.

The falling edge of the RESET should follow the last pixel of the previous line's read-out. Thus, one cycle of RESET pulses cannot be set shorter than the time equal to  $(17 + 4 \times N)$  clock cycles, where N is the number of pixels.

EOS of each detector chip appears during the output of the last pixel.


<sup>xvi</sup> RESET must stay Low [tplw(RESET)] for at least twelve clock cycles.

<sup>xvii</sup> The falling edge of RESET pulse determines the end of the integration time and the start of signal read-out, while the rising edge of the RESET pulse determines the start of the integration time. As a result, the signal-charge integration time can be controlled externally with the width of the RESET pulse [tphw(RESET)]. However, the charge integration does not start at the rise of a RESET pulse but starts at the 8<sup>th</sup> falling edge of clock after the rise of the RESET pulse and ends at the 7<sup>th</sup> falling edge of clock after the fall of the RESET pulse.

<sup>xviii</sup> The rising and falling edges of RESET must observe the setup and hold time requirements around the falling edges of CLK.



## ■ Mechanical drawings<sup>xix</sup>

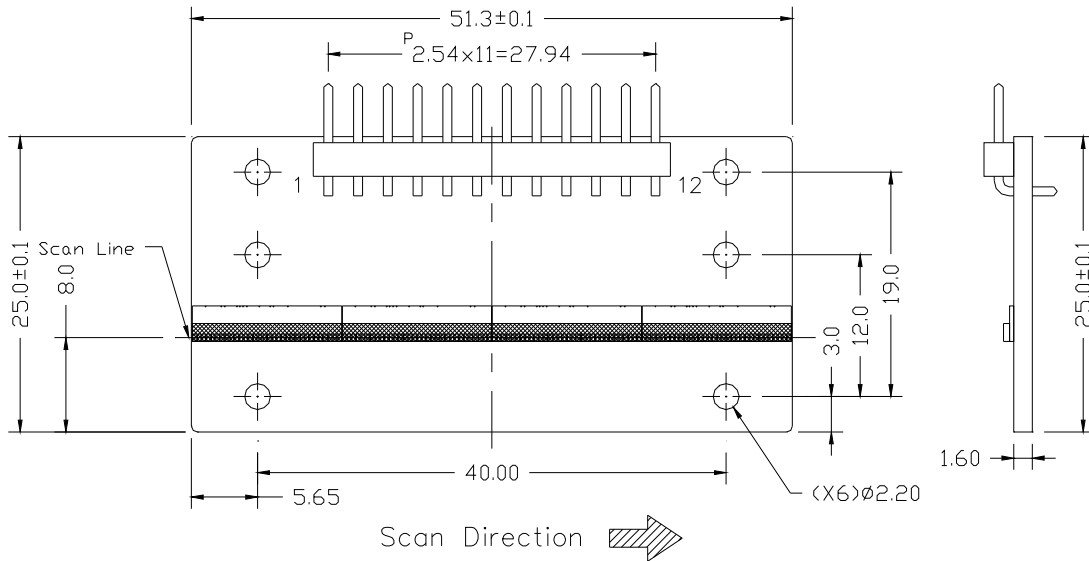

<sup>xix</sup> Unit: Dimensions are in millimeters (mm).

Board: FR4 epoxy resin bonded glass fabric.

Connector: BISON Advanced Technology Corp., Ltd. ([www.bison-protech.com](http://www.bison-protech.com)), P101-RGP-060/030-12 or similar.

## ■ Pin connections

Pin No.	Symbol	Name	Description
1	RESET	Reset Pulse	Negative-going pulse input
2	CLK	Clock Pulse	Pulse input
3	TRIG	Trigger Pulse	Positive-going pulse output
4	EXTSP	External Start Pulse	Pulse/voltage input
5	VMS	Master/Slave Selection	See sensitivity selection table
6	VDD	Supply Voltage	5-V supply voltage
7	GND	Ground	Common ground voltage
8	EOS	End of Scan	Negative-going pulse output
9	VIDEO	Video Output	Negative-going output with respect to VREF
10	VREF	Reference Voltage	Voltage input
11	PG1	Sensitivity Selection	See sensitivity selection table
12	PG2	Sensitivity Selection	See sensitivity selection table

## ■ Sensitivity Selection Table

Sensitivity Mode	PG2	PG1	Relative Sensitivity
1	GND	GND	1/8
2	GND	VDD	1/4
3	VDD	GND	1/2
4	VDD	VDD	1

## ■ Master/slave selection with start pulse EXTSP settings (VMS=GND)

For most applications, multiple detectors are read out in parallel. To ensure parallel read out, set the EXTSP inputs of all detectors to LOW (A in the table below).

In applications where two or more linearly connected detectors are read out sequentially (in series), set the first detector's EXTSP to LOW while connecting the EXTSP input of each subsequent detector to the EOS output of each respective preceding detector (B in the table below). The CLK and RESET pulses should be shared among all detectors and the Video output terminals of all detectors are connected together. The maximum number of detectors that can be daisy-chained together is limited by the maximum Video output capacitance requirement.

	Operation Mode	EXTSP
A	Master configuration: Parallel readout: all detectors Serial readout: 1 <sup>st</sup> detector only	LOW
B	Slave configuration: Serial readout: 2 <sup>nd</sup> and later detectors	Preceding detector's EOS should be input

## ■ Master/slave selection voltage VMS and external start pulse EXTSP settings

For most applications, multiple detectors are read out in parallel. To ensure parallel read out, set the VMS input of all detectors to VDD (A in the table below).

In applications where two or more linearly connected detectors are read out sequentially (in series), set the VMS input of the first detector to VDD and the VMS input of each subsequent (second and later) detector to GND while connecting the EXTSP input of each subsequent detector to the EOS output of each respective preceding detector (B in the table below). The CLK and RESET pulses should be shared among all detectors and the Video output terminals of all detectors are connected together. The maximum number of detectors that can be daisy-chained together is limited by the maximum Video output capacitance requirement.

	Operation Mode	VMS	EXTSP
A	Master configuration: Parallel readout: all detectors Serial readout: 1 <sup>st</sup> detector only	VDD	Don't care
B	Slave configuration: Serial readout: 2 <sup>nd</sup> and later detectors	GND	Preceding detector's EOS should be input

## ■ Readout circuit

In order to minimize noise and to maximize performance, an operational amplifier should be placed close to the detector to amplify the Video signal.

---

Information furnished by X-Scan Imaging is believed to be accurate and reliable. However, no responsibility is assumed by X-Scan Imaging Corporation for its use. Users are responsible for their products and applications using X-Scan Imaging components. To minimize the risks associated with users' products and applications, users should provide adequate design and operating safeguards. No responsibility is assumed by X-Scan Imaging Corporation for any infringements of patents or other rights of third parties that may result from the use of the information. No license is granted by implication or otherwise under any patent or patent rights of X-Scan Imaging Corporation.

© 2014 X-Scan Imaging Corp.

107 Bonaventura Dr., San Jose, CA 95134, U.S.A.

Tel: +1 408 432 9888

Fax: +1 408 432 9889

[www.x-scanimaging.com](http://www.x-scanimaging.com)

## Linear X-Ray Photodiode Detector Array with Signal Amplification

# XB8850 Series

An X-Scan Imaging XB8850 linear detector array is constructed of CMOS silicon photodiode array detector chips mounted on a single printed-circuit board. The imaging circuit of each detector chip consists of a contiguous linear array of photodiodes, a timing generator, digital scanning shift register, an array of charge integrating amplifiers, sample-and-hold circuits, and signal amplification chain. Each detector array generates an End-Of-Scan (EOS) pulse that can be used to initiate the scanning of the next detector array. Thus, a longer, continuous detector array can be formed from a daisy chain of smaller detector arrays.


For x-ray scanning applications, a scintillator material tailored to the user's application is attached to the surface of the detector array to convert x-ray photons into visible light for detection by the photodiode array. The XB8850 photodiode array is uniquely designed and processed to reduce radiation damage from the x-ray flux. The signal processing circuits are positioned 2 mm away from the photodiode array. These circuits are shielded from direct x-ray radiation using an external heavy-metal shield. The precision alignment of the metal shield with respect to the signal processing circuits is performed at the factory using a special molded housing and chip-on-board (COB) technology.

### Key Features

- Small element pitch with two selectable resolution modes: 50  $\mu\text{m}$  and 100  $\mu\text{m}$
- A large selection of lengths at multiples of 0.5 inches:
  - 0.5 inches (256 pixels at 50  $\mu\text{m}$ , 128 pixels at 100  $\mu\text{m}$ )
  - 1.0 inch (512 pixels at 50  $\mu\text{m}$ , 256 pixels at 100  $\mu\text{m}$ )
  - 1.5 inches (768 pixels at 50  $\mu\text{m}$ , 384 pixels at 100  $\mu\text{m}$ )
  - 2.0 inches (1024 pixels at 50  $\mu\text{m}$ , 512 pixels at 100  $\mu\text{m}$ )
  - etc.
- 5-V power supply operation
- Simultaneous integration by using an array of charge integrating amplifiers
- Sequential readout with a digital scanning shift register (Data rate: 1 MHz max.)
- Integrated CDS circuits allow low noise and wide dynamic range up to > 4000
- User-specified scintillator material GOS, CsI(Tl), CdWO<sub>4</sub>, etc.

### Applications

- Linear x-ray imaging for industrial inspection
- Linear x-ray imaging for biological and industrial CT

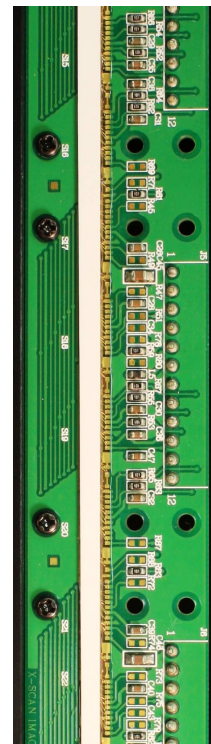

## ■ Mechanical specifications

Parameter	Symbol <sup>i</sup>	XB8850-6.0G <sup>ii</sup>		XB8850-12.0G <sup>iii</sup>		Unit
		100 $\mu\text{m}$ <sup>iv</sup>	50 $\mu\text{m}$ <sup>v</sup>	100 $\mu\text{m}$ <sup>iv</sup>	50 $\mu\text{m}$ <sup>v</sup>	
Element pitch	P	100	50	100	50	$\mu\text{m}$
Element diffusion width	W	40×2	40	40×2	40	$\mu\text{m}$
Element height	H	75	75	75	75	$\mu\text{m}$
Number of elements	–	1536	3072	3072	6144	–
Active area length	–	153.6	153.6	307.2	307.2	mm

<sup>i</sup> Refer to enlarged view of active area figure.


<sup>ii</sup> 6-inch long detector is specified here. Other lengths (at multiples of 0.5 inches) are available upon request.

<sup>iii</sup> 12-inch long detector is specified here. Other lengths (at multiples of 0.5 inches) are available upon request.

<sup>iv</sup> When RS (pin 12) is tied to GND, the detector operates in the 100- $\mu\text{m}$  resolution mode. There are 1536 pixels in a 6-inch 100- $\mu\text{m}$  detector; there are 3072 pixels in a 12-inch 100- $\mu\text{m}$  detector.

<sup>v</sup> When RS (pin 12) is tied to VDD, the detector operates in the 50- $\mu\text{m}$  resolution mode. There are 3072 pixels in a 6-inch 50- $\mu\text{m}$  detector; there are 6144 pixels in a 12-inch 50- $\mu\text{m}$  detector.

## ■ Enlarged view of active area

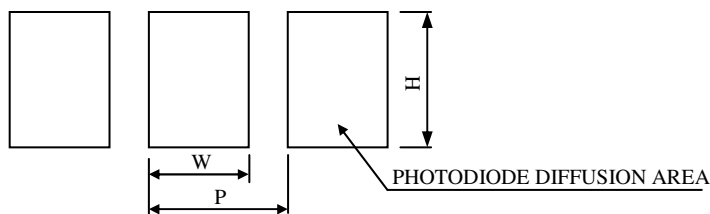

## ■ Absolute maximum ratings



*Electronic device sensitive to electrostatic discharge and x-ray radiation.* Although this device features ESD protection circuitry, permanent damage ranging from subtle performance degradation to complete device failure may occur on devices subjected to high-energy electrostatic discharges. Furthermore, although this device features radiation shielding for protection against anticipated x-ray radiation, permanent damage ranging from subtle performance degradation to complete device failure may occur on devices subjected to unanticipated x-ray radiation (e.g. off-axis or extremely high energy radiation). Therefore, proper precautions against ESD and x-ray radiation must be taken during handling and storage of this device.

Parameter	Symbol	Min	Max	Unit
Supply voltage	VDD	–0.3	+6	V
Reference voltage	VREF	–0.3	VDD + 0.3	V
Digital input voltages		–0.3	VDD + 0.3	V
Operating temperature <sup>vi</sup>	Topr	–5	+60	°C
Storage temperature	Tstg	–10	+70	°C

<sup>vi</sup> Humidity must be controlled to prevent the occurrence of condensation.

## Photodiode Detector with Signal Amplification XB8850 Series

### ■ Recommended terminal voltage

Parameter	Symbol	Min.	Typ.	Max.	Unit
Supply voltage	VDD	4.75	5	5.25	V
Reference voltage	VREF	–	3.00	–	V

### ■ Electrical characteristics [Ta = 21°C, VDD = 5 V]

Parameter	Symbol	Min.	Typ.	Max.	Unit	
<b>Digital</b>						
Clock pulse frequency <sup>vii</sup>	f(CLK)	40	–	4000	KHz	
Digital input voltage <sup>viii</sup>	High level	Vih	4.0	VDD	V	
	Low level	Vil	0	0	0.4	V
Digital input capacitance	Ci	–	40	–	pF	
Digital input leakage current	Ii	–10	+10	–	μA	
Digital output voltage <sup>ix</sup>	High level	Voh	4.25	VDD	V	
	Low level	Vol	0	0	0.4	V
Digital output load capacitance	Co	–	–	50	pF	
<b>Analog</b>						
Reference voltage input impedance <sup>x</sup>	6.0G	Rref	–	1	–	KΩ
	12.0G		–	0.5	–	KΩ
Charge amplifier feedback capacitance <sup>xi</sup>	High sensitivity	Cfhs	–	0.1	–	pF
	Low sensitivity	Cfls	–	0.4	–	pF
Video output impedance	Zv	–	1	–	KΩ	
Video output load capacitance	Cv	–	–	100	pF	
<b>Power</b>						
Power consumption	6.0G	P	–	600	–	mW
	12.0G		–	1200	–	mW

<sup>vii</sup> Video rate is 1/4 of clock pulse frequency f(CLK).

<sup>viii</sup> Digital inputs include CLK, RESET, EXTSP, VMS, SNS, and RS (see pin connections).

<sup>ix</sup> Digital outputs include Trig and EOS (see pin connections).

<sup>x</sup> Reference voltage input impedance is dependent on length of detector. For a 6-inch detector (XB8850-6.0G), the input impedance is 1 KΩ. For a 12-inch detector (XB8850-12.0G), the input impedance is 0.5 KΩ.

<sup>xi</sup> The sensitivity selection pin (see SNS in pin connections) controls the sensitivity of the detector by selecting whether the pixel charge amplifier feedback capacitance is Cfhs or Cfls. At Cfhs, the detector has high sensitivity. At Cfls, the detector has low sensitivity.

# Photodiode Detector with Signal Amplification XB8850 Series

## ■ Electro-optical characteristics [Ta = 21°C, VDD = 5 V, V(SNS) = 5 V (High sensitivity), 0 V (Low sensitivity)]

Parameter	Symbol	XB8850-6.0 /12.0 (100 um mode)			XB8850-6.0/12.0 (50 um mode)			Unit
		Min.	Typ.	Max.	Min.	Typ.	Max.	
Output reference voltage <sup>xii</sup>	Vos	–	VRE F	–	–	VRE F	–	V
Dark signal voltage <sup>xiii</sup>	High sensitivity	–70	–	160	–90	–	70	mV
	Low sensitivity	–90	–	70	–100	–	70	
X-ray sensitivity <sup>xiv</sup>	High sensitivity	–	200	–	–	100	–	V/R
	Low sensitivity	–	50	–	–	25	–	
Photo response non-uniformity <sup>xv</sup>	PRNU	–10	–	10	–10	–	10	%
Noise <sup>xvi</sup>	High sensitivity	–	2.5	–	–	2.5	–	mVrms
	Low sensitivity	–	1.5	–	–	1.5	–	
Saturation output voltage	Vsat	2.8	–	–	2.8	–	–	V

<sup>xii</sup> Video output is negative-going output with respect to the output offset voltage.

<sup>xiii</sup> Difference between output reference voltage and absolute output voltage with an integration time of 25 ms.

<sup>xiv</sup> Measured with tube energy of 50KVp. Other scintillations with different sensitivity are available.


<sup>xv</sup> Measured without scintillation. When the photodiode array is exposed to uniform light which is 50% of the saturation exposure, the Photo Response Non Uniformity (PRNU) is defined as follows:

$$PRNU = \Delta X \div X \times 100\%$$


where X is the average output of all elements and ΔX is the difference between the maximum and minimum outputs.

<sup>xvi</sup> Measured with a video data rate of 750 KHz and an integration time of 25 ms in dark state.


## ■ Output waveform of one element

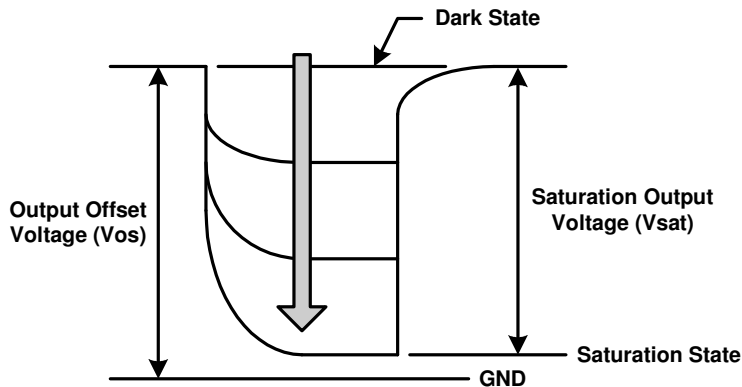


## ■ Block diagram

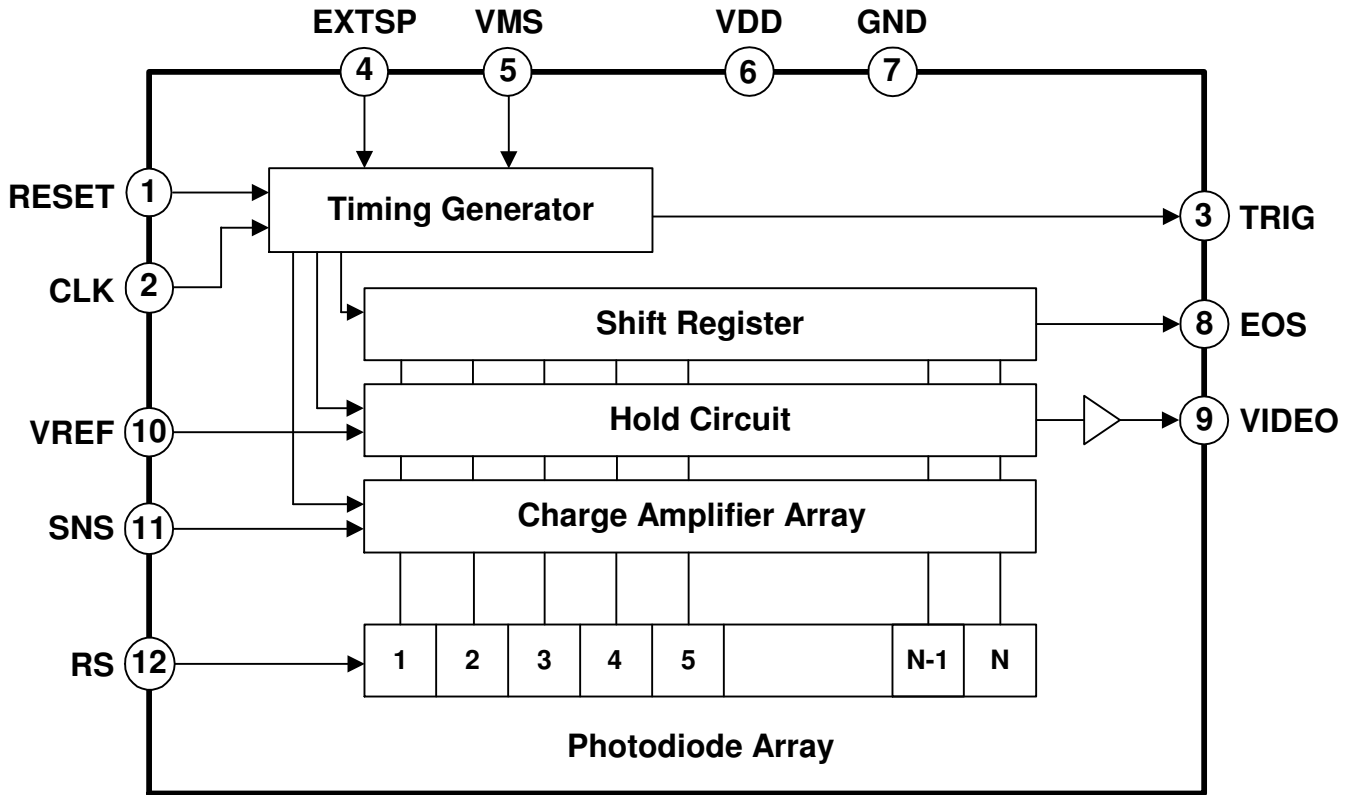

## ■ Timing chart<sup>xvii</sup>

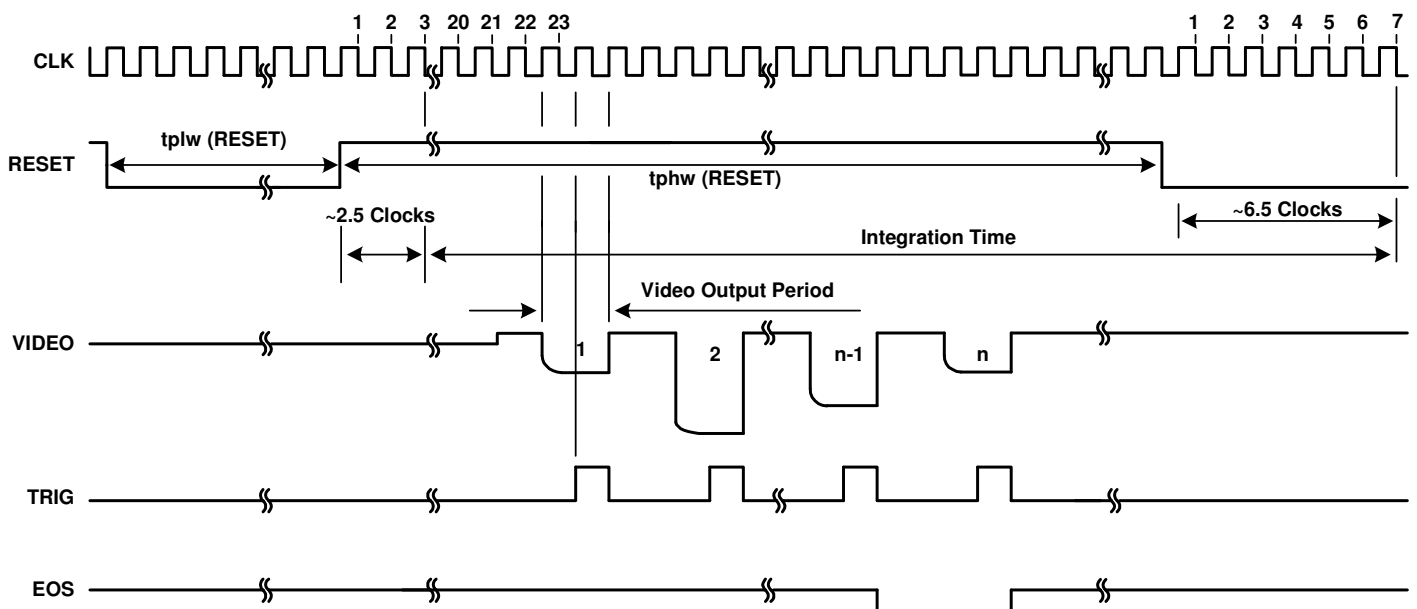



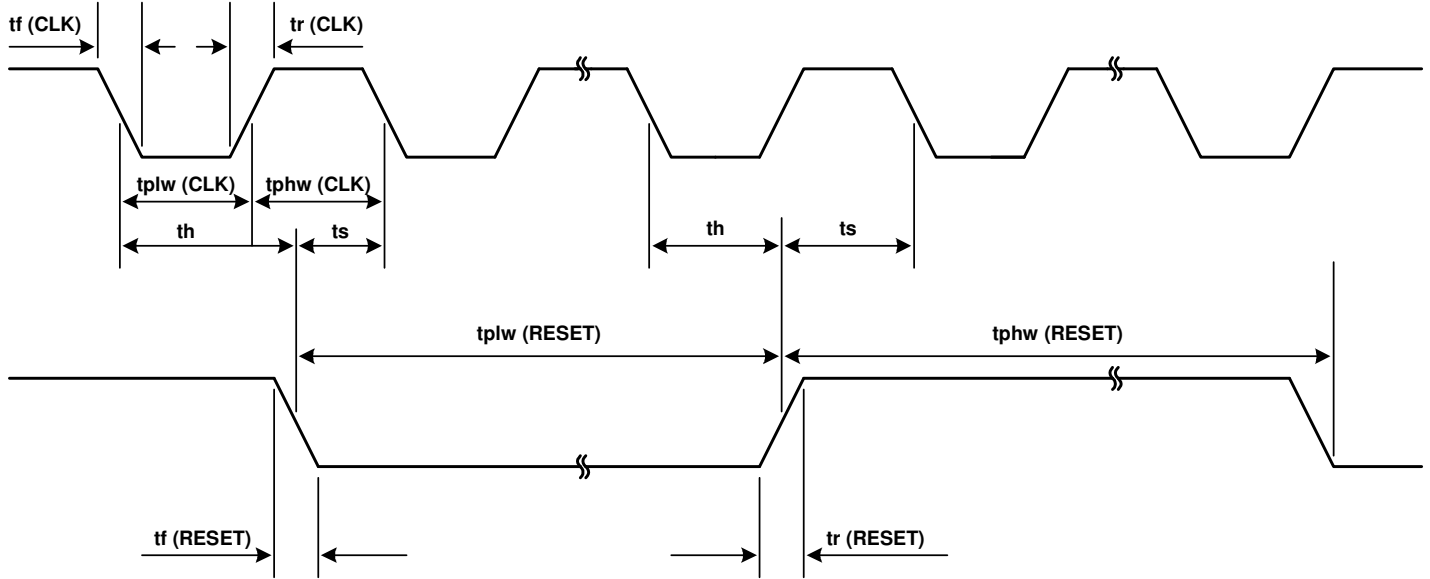

Parameter	Symbol	Min.	Typ.	Max.	Unit
Clock pulse low/high width	tplw (CLK), tphw (CLK)	100	–	–	ns
Clock pulse rise/fall times	tr (CLK), tf (CLK)	0	20	30	ns
Reset pulse low width <sup>xviii</sup>	tplw (RESET)	12/ f(CLK)	16 / f(CLK)	–	ms
Reset pulse high width <sup>xix</sup>	tphw (RESET)	20	–	–	μs
Reset pulse rise/fall times	tr (RESET), tf (RESET)	0	20	30	ns
Reset pulse setup time <sup>xx</sup>	ts	40	–	–	ns
Reset pulse hold time	th	40	–	–	ns

<sup>xvii</sup> The falling of Video just before the 23<sup>th</sup> falling edge of CLK after transition of RESET from Low to High corresponds to the first pixel. The video output for the first pixel should be read around the 24<sup>th</sup> falling edge and before the subsequent rising CLK edge while Trig is high. After the first pixel, a pixel output appears on Video at every 4th clock cycle.

Care should be taken to prevent the rising edge of the RESET during the video output. Improper positioning of the RESET edges can lead to interference with the read-out.

The falling edge of the RESET should follow the last pixel of the previous line's read-out. Thus, one cycle of RESET pulses cannot be set shorter than the time equal to  $(34 + 4 \times N)$  clock cycles, where N is the number of pixels.


EOS of each detector chip appears during the output of the last pixel.

<sup>xviii</sup> RESET must stay Low [tplw(RESET)] for at least twelve clock cycles; the low pulse width tplw(RESET) should be an integer multiple of four clock cycles [ $4/f(\text{CLK})$ ].

<sup>xix</sup> The falling edge of RESET pulse determines the end of the integration time, while the rising edge of the RESET pulse determines the start of the integration time and the start of signal read-out. As a result, the signal-charge integration time can be controlled externally with the width of the RESET pulse [tphw(RESET)]. However, the charge integration does not start at the rise of a RESET pulse but starts at the 2<sup>nd</sup> falling edge of clock after the rise of the RESET pulse and ends at the 7<sup>th</sup> falling edge of clock after the fall of the RESET pulse.

<sup>xx</sup> The rising and falling edges of RESET must observe the setup and hold time requirements around the falling edges of CLK.

## ■ Mechanical drawings<sup>xxi</sup>

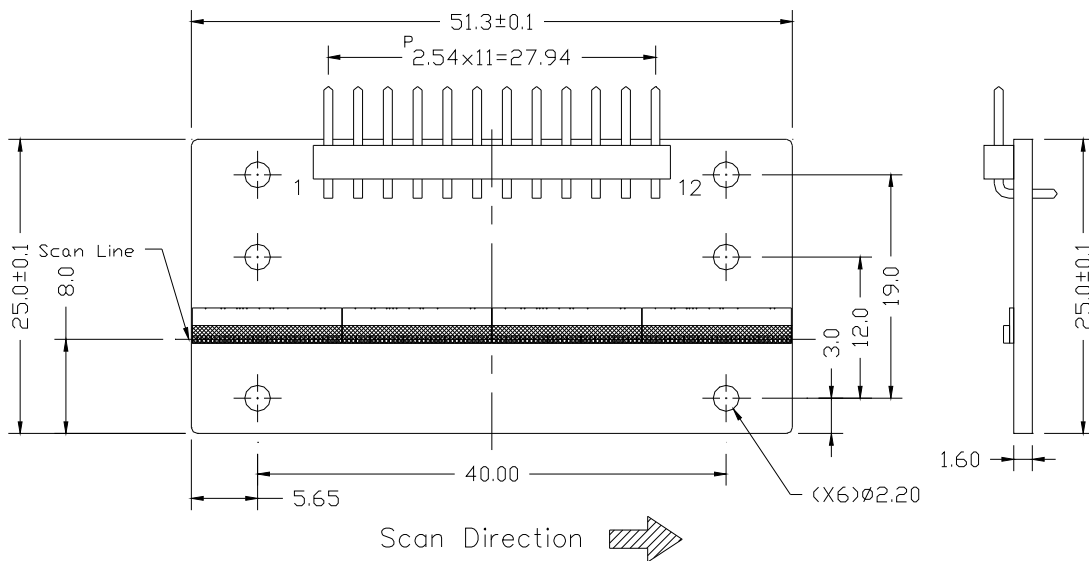

<sup>xxi</sup> Unit: Dimensions are in millimeters (mm).

Board: FR4 epoxy resin bonded glass fabric.

Connector: BISON Advanced Technology Corp., Ltd. ([www.bison-protech.com](http://www.bison-protech.com)), P101-RGP-060/030-12 or similar.

## ■ Pin connections

Pin No.	Symbol	Name	Description
1	RESET	Reset Pulse	Negative-going pulse input
2	CLK	Clock Pulse	Pulse input
3	TRIG	Trigger Pulse	Positive-going pulse output
4	EXTSP	External Start Pulse	Pulse/voltage input
5	VMS	Master/Slave Selection Voltage	Voltage input: See Master/slave selection voltage VMS and external start pulse EXTSP settings note
6	VDD	Supply Voltage	5-V supply voltage
7	GND	Ground	Common ground voltage
8	EOS	End of Scan	Negative-going pulse output
9	VIDEO	Video Output	Negative-going output with respect to VREF
10	VREF	Reference Voltage	Voltage input
11	SNS	Sensitivity Selection	Voltage input: High (VDD) for high sensitivity (C <sub>fs</sub> ) Low (GND) for low sensitivity (C <sub>fls</sub> )
12	RS	Resolution Selection	Voltage input: High (VDD) for 50-um pitch Low (GND) for 100-um pitch

## ■ Master/slave selection voltage VMS and external start pulse EXTSP settings

For most applications, multiple detectors are read out in parallel. To ensure parallel read out, set the VMS input of all detectors to VDD (A in the table below).

In applications where two or more linearly connected detectors are read out sequentially (in series), set the VMS input of the first detector to VDD and the VMS input of each subsequent (second and later) detector to GND while connecting the EXTSP input of each subsequent detector to the EOS output of each respective preceding detector (B in the table below). The CLK and RESET pulses should be shared among all detectors and the Video output terminals of all detectors are connected together. The maximum number of detectors that can be daisy-chained together is limited by the maximum Video output capacitance requirement.

	Operation Mode	VMS	EXTSP
A	Master configuration: Parallel readout: all detectors Serial readout: 1 <sup>st</sup> detector only	VDD	Don't care
B	Slave configuration: Serial readout: 2 <sup>nd</sup> and later detectors	GND	Preceding detector's EOS should be input

## ■ Readout circuit

In order to minimize noise and to maximize performance, an operational amplifier should be placed as close to the detector to amplify the Video signal.

Information furnished by X-Scan Imaging is believed to be accurate and reliable. However, no responsibility is assumed by X-Scan Imaging Corporation for its use. Users are responsible for their products and applications using X-Scan Imaging components. To minimize the risks associated with users' products and applications, users should provide adequate design and operating safeguards. No responsibility is assumed by X-Scan Imaging Corporation for any infringements of patents or other rights of third parties that may result from the use of the information. No license is granted by implication or otherwise under any patent or patent rights of X-Scan Imaging Corporation.

© 2015 X-Scan Imaging Corp.

107 Bonaventura Dr., San Jose, CA 95134, U.S.A.

Fax: +1 408 432 9889

Tel: +1 408 432 9888

[www.x-scanimaging.com](http://www.x-scanimaging.com)

## X-Ray Time Delay Integration (TDI) Camera

# XTI90802 TDI 0.2mm

X-Scan Imaging has expanded the selection of Time Delay Integration (TDI) cameras to 0.2mm resolution with the new 8 stage 90802 series detectors. Increased sensitivity compared to traditional LDAs provides higher signal to noise ratio and the opportunity to reduce X-Ray source power. Double the resolution compared to standard 0.4mm LDAs while retaining similar signal level.

### Key Features:




- 0.2 mm resolution
- High signal to noise ratio
- 8 Stage TDI for high sensitivity
- Readout rate matches existing 0.4 mm systems up to 1.2m/s
- Dual Energy Configurations Available
- GigE/Camera Link/USB 3.0
- Software development kit (SDK) with application programming interface (API)

### Applications:

- Food
- Electronics
- Fabricate and material sorting
- Pharmaceutical

### Standard Cross Sections

Lengths 12 to 72+ inches in 6 inch increments

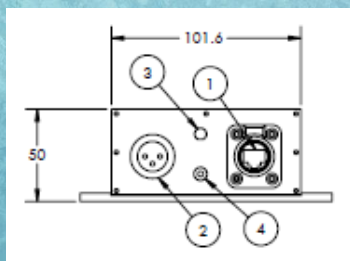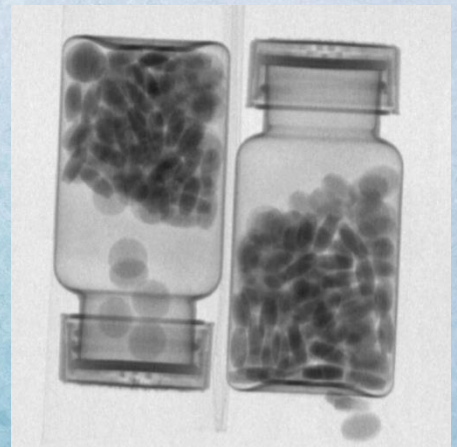




# XB90802 TDI Sensor Board

## Compare to 0.4 mm LDA boards:


- Retains a similar signal level to 0.4 mm LDA boards at the same scan speeds
- Scan speed up to 1.2m/s
- Drop in replacement for standard 0.4 mm LDA boards
- Physical variation from standard 0.4 mm boards shown below
- Contact X-Scan Imaging for data sheets and dimensions

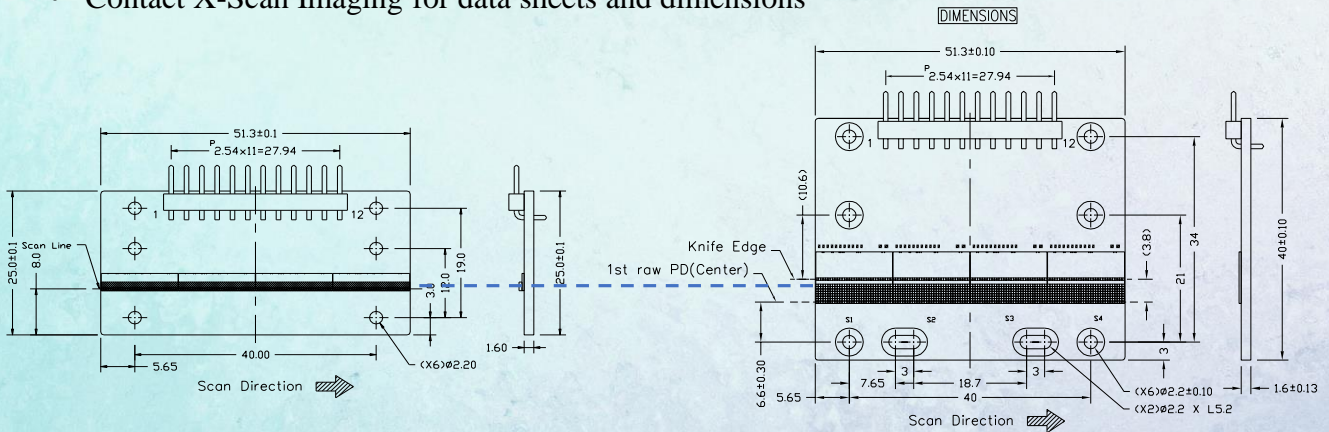

## Principle of Operation ‘Multiple Exposures’

### 8 integrated multiple exposure compared to single shot LDA

**XB90802 TDI 0.2 X 0.2mm**

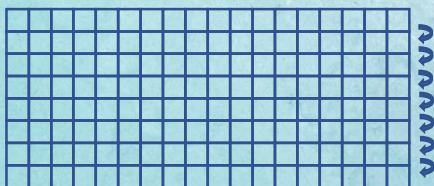

Area  $0.2 \times 0.2 \times 8 = \underline{0.32}$

**G7=GRZ Plus**

**XB8804 LDA 0.4mm X 0.6mm**



Area  $0.4 \times 0.6 = 0.24$

**G1=DRZ HI:  $0.24 \times 1.25 = \underline{0.30}$**

## Benefits

- High resolution at high speed
- Compared to LDA, reduce X-Ray source power for same signal
- Drop in replacement to 0.4mm up to 1.2m/s up to 18 inch detector length
- More Signal to Noise ratio
- Software Binning to 0.4 mm

This information for reference only, subject to change.