



Specification

8 Visible Band Multispectral Drone Camera

MSDC-VIS8-1-A



MSDC-VIS8-1-A

Specifications subject to change

Revised April 29, 2024

Version 003

Table of Contents

Background Information	3
Trademarks	3
Sales and Support	3
1. Description	4
2. Key Features	4
3. Applications	4
4. Sensor and its Spectral Characteristics	6
5. Anti-X-Talk™ Technology	6
6. Specifications	8
7. Camera Mechanical Drawings	9
8. Package Contents	10

Background Information

Trademarks

Spectral Devices Inc., MSC2,MS2-VIS8-1-A, MSDC-VIS8-1-A

Sales and Support

Contact Type	Contact Information
Email	sales@spectraldevices.com support@spectraldevices.com
Knowledge Base and Downloads	www.spectraldevices.com
Main Office	Spectral Devices Inc. 800 Collip Circle, Suite 129-130 London, Ontario, Canada N6G 4X8 +1-888-988-2077

1. Description

The multispectral drone camera is a turnkey multispectral imaging solution for easy integration into drones with PixHawk flight controllers enabling capture of geotagged aerial images for further analysis in data mapping software.

Each MSDC-VIS8-1-A includes a snapshot multispectral camera (MSC2-VIS8-1-A), a lens, a vision computer, and a high-performance 3-axis gimbal (optional). System is compatible with common drone platforms. The system is energy-efficient, lightweight, and comes fully configured with camera control and image capture software. Images can be saved to SD card at up to 10 FPS. Start and stop buttons control image capture on demand. A live multispectral video feed is available for downlink.

The MSC2 RGB-NIR multispectral camera incorporates a high performance 4MP CMOS sensor that is modified with Spectral Devices proprietary multispectral filter array technology.

This miniature multispectral snapshot camera simultaneously captures images at 8 distinct bands (spaced between 460 nm and 670 nm) at 89 frames per second in full frame mode. There is no requirement for additional filters, filter wheels, or tunable filters.

2. Key Features

- Snapshot Operation (capture spectral images simultaneously)
- Captures 4 Bands (474, 495, 526, 546, 578, 602, 621, 640 nm)
- Anti-X-Talk™ Technology (enhances contrast and spectral performance)
- High Frame Rate (up to 178 FPS)
- High Performance (4MP Global Shutter 1-inch CMOS Sensor)
- Lens Mount C-mount
- Interface USB3.0
- Camera weight 55 g, computer weight 140 g, gimbal weight 465 g
- Real-time HDMI output of multispectral images
- Power: 5V/4A input
- Input Voltage UBEX 14 – 52 V
- Input Voltage Gimbal 12V / 5A
- Connection USB, CAN, UART, HDMI
- Pan Range +/- 330 degrees
- Tilt Range -45 degree / +135 degree
- Roll Range -90 degree / +45 degree

3. Applications

The camera is suitable for applications such as remote sensing for agriculture and geological surveys and many others. Combined with Spectral Devices SBC-1 miniature vision

computer, the MSC2-VIS8-1-A offers an easy-to-use lightweight and modular imaging solution for UAV users.

4. Sensor and its Spectral Characteristics

The MSC2-VIS8-1-A camera has 8 distinct bands centered at 474, 495, 526, 546, 578, 602, 621, 640 nm (FWHM 20-30 nm). The sensor of the camera is covered with a multispectral filter array providing each sensor element (pixel) its own spectral response (Fig.4.1a). Spectral response of the MSC2-VIS8-1-A camera sensor is displayed in Fig.4.1b.

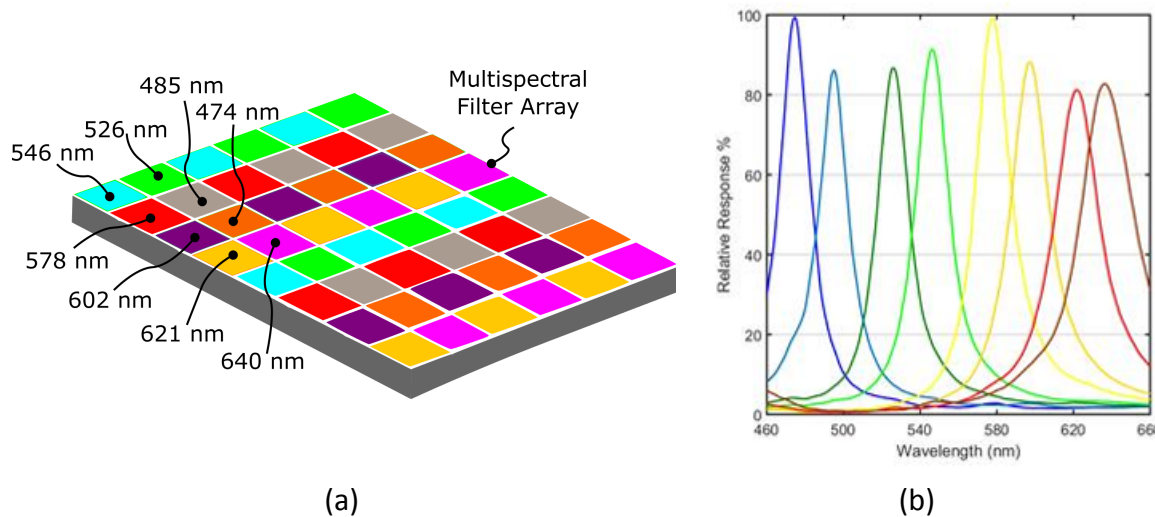


Figure 4.1. (a) Example of MSC2-VIS8-1-A multispectral filter array structure (note: band arrangement can vary between cameras) (b) Spectral response of the MSC2-VIS8-1-A camera.

5. Anti-X-Talk™ Technology

Anti-X-Talk™ technology is a unique Spectral Devices Inc. on-chip technology working at the filter level and preventing light leakage between individual filters. Without Anti-X-Talk™ technology, stray light between spectral channels is significant, often exceeding the light leakage due to spectral overlap between adjacent filters. As a result images suffer from low contrast and spectral ambiguity.


Spectral Devices invented Anti-X-Talk™ technology to overcome these problems. It works by blocking stray light between adjacent filters, making the pixel response more predictable and directly related to the actual spectral response of the overlying pixelated filter. The result is multispectral images with better spectral discrimination and higher contrast.

Furthermore, high quality image data from the MSC2-VIS8-1-A can be used as is without the need for proprietary post-processing algorithms and the camera can be used with a wide range of lens types even at large apertures (e.g. f/2).

6. Specifications

Lens Mount	C-mount
Sensor Type	CMOS
Sensor Model	AMS CMV4000
Sensor Format	1-inch
Number of Spectral Channels	4
Image Pixels Per Spectral Channel	256x256 (512 x 512 after debayering)
Effective Pixel Size (H x V)	5.5 μm x 5.5 μm
Capture Method	Area
Spectral Channels	474, 495, 526, 546, 578, 602, 621, 640 nm
Spectral Bandwidth (FWHM)	~70 nm
On-chip Spectral Enhancement	Anti-X-Talk™ Technology
Shutter Type	Global
Exposure time	22 μs to 16.77 seconds (Default: 11,116.0 μs)
Auto Exposure	Supported
Interface	USB3.0
Weight	Camera 55g, computer 140g, gimbal 465g, total 660g
Power	5V/4A input
Input Voltage	UBEX 14 – 52 V, Gimbal 12V / 5A
Connection	USB, CAN, UART, HDMI
Pan Range	+/- 330 degrees
Tilt Range	-45 degree / +135 degree
Roll Range	-90 degree / +45 degree

7. Camera Mechanical Drawings

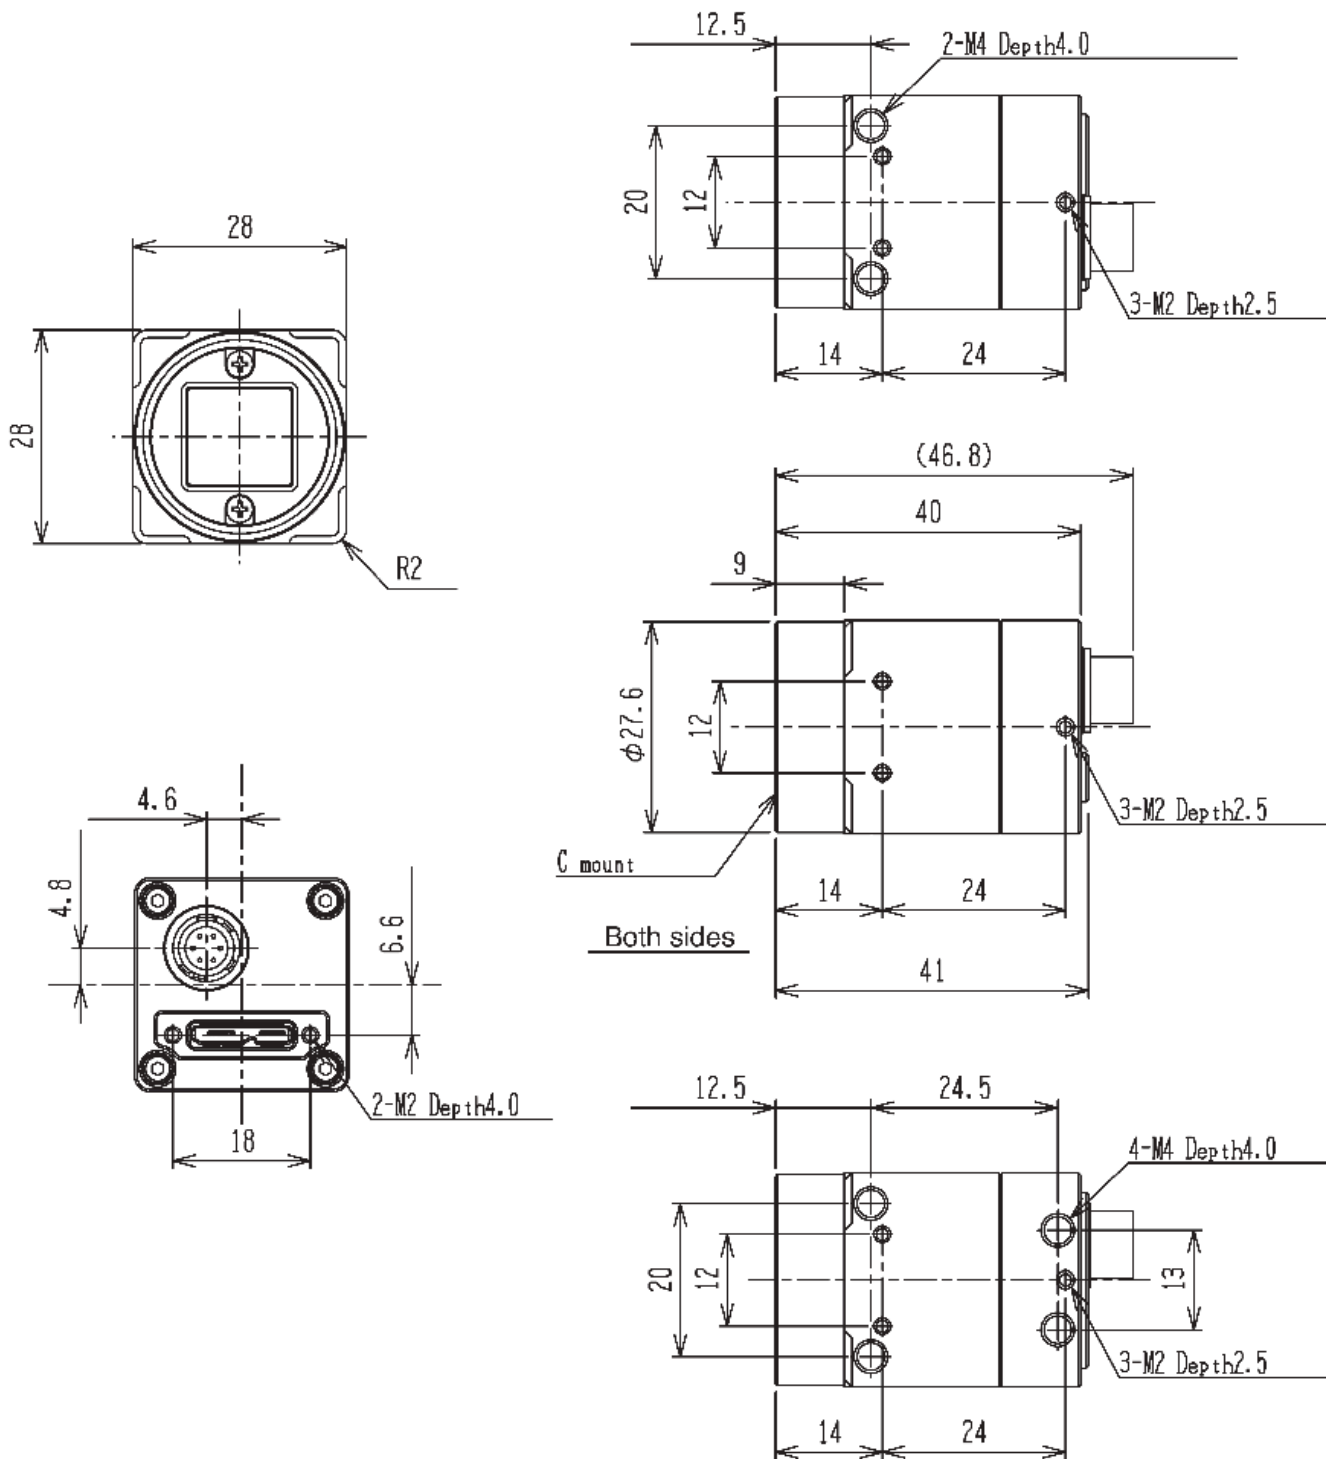

8. Package Contents

The MSDC is shipped with several items including a multispectral camera integrated with a vision computer, lockable ruggedized lens, 128 GB microSD card with microSD adaptor, a Pixy U Gremsy Gimbal (optional), Camera and Vision Computer Cables to the camera gimbal end, Camera Trigger IN/OUT from the QR gimbal end to Pixhawk, gimbal other accessories, power adaptor, a country specific power cord, and a USB Wi-Fi dongle. All accessories come in a waterproof case.




The MSDC is a multispectral drone camera for easy integration to drones with PixHawk flight controllers enabling capture of geotagged aerial images for further analysis in data mapping software.

FEATURES

- Captures co-registered spectral images simultaneously
- 8 bands – 474, 495, 526, 546, 578, 597, 621, 640 nm
- Anti-X-Talk™ Technology - enhances contrast and spectral performance
- Frame rates @ 45 FPS
- 4MP Global Shutter CMOS sensor
- Accommodates c-mount lenses
- Weight: camera 55g, computer 140g, gimbal 465g, total 660g

SENSOR

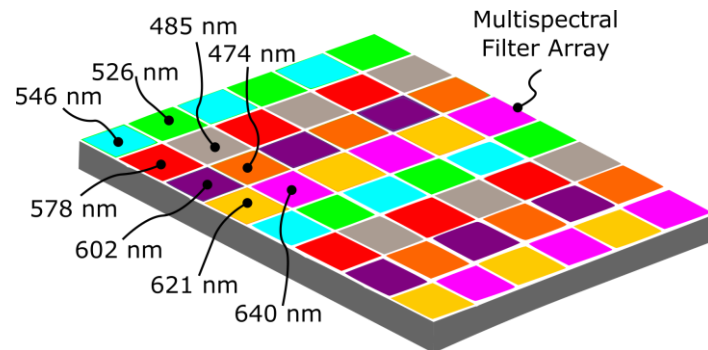

SPECTRAL RESPONSE

